









DIMENSIONS

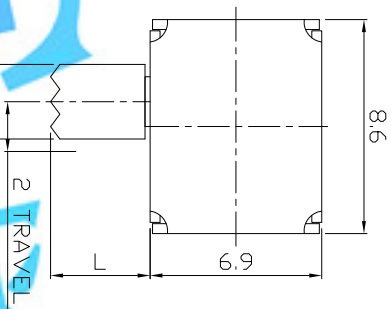

MODEL CODE


SK-22D03-GET

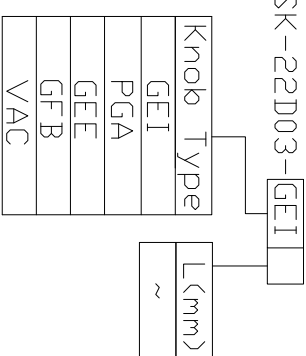

BOTTOM VIEW ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

BOTTOM VIEW

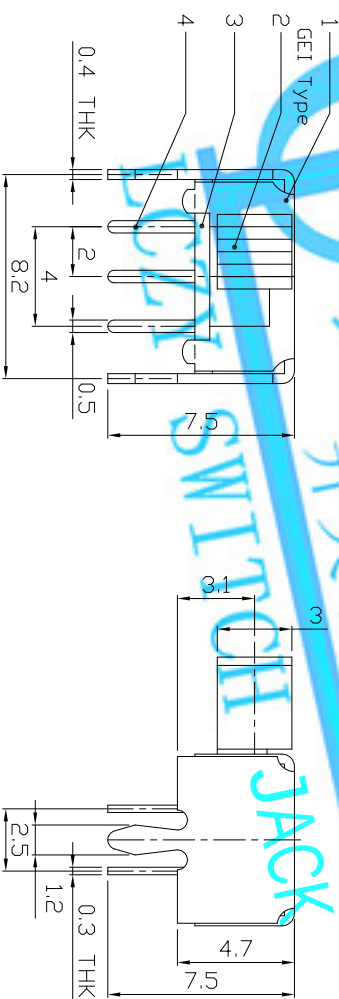

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	NO SHORTING
TRAVEL	2mm
OPERATING FORCE	300 $\pm$ 100gf
OPERATING LIFE(cycles)	10,000

[illegible]