

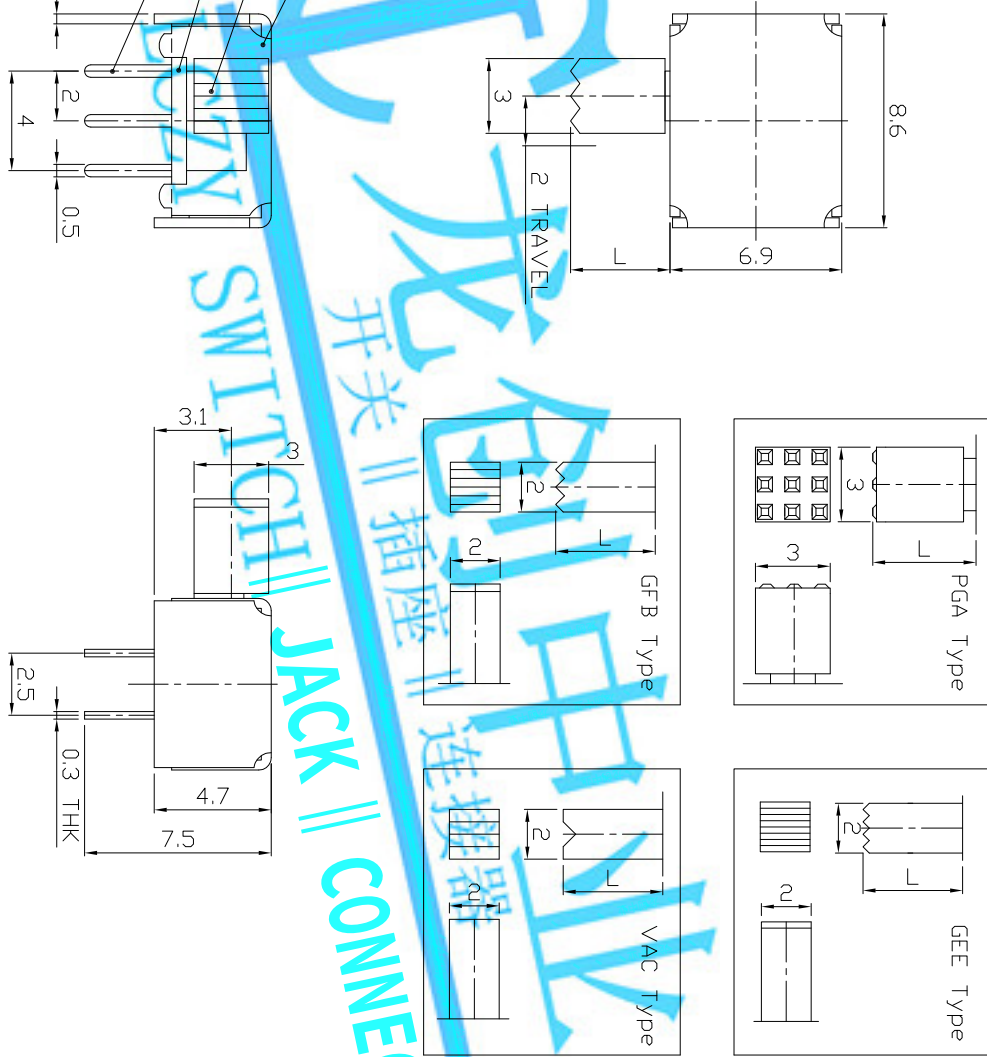


DIMENSIONS




MODEL CODE

SK-22D09-GEI



P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm		UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7					OVER 1.5mm: ±0.2mm		MAT'L						mm
6	SPRING PLATE	PBS STRIP	1	NATURAL			SEE NOTE						
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED									
4	TERMINAL	BRASS STRIP	6	Ag PLATED			FINISH	TITLE: SLIDE SWITCH / HORIZONTAL					
3	BASE	PHENOLIC RESIN	1	NATURAL			SEE NOTE						
2	KNOB	POM	1	BLACK			DR: <i>Rocky</i> 2016/06/24						DWG NO: ADL-22D09
1	FRAME	STEEL STRIP	1	NI PLATED			CHKD: <i>Rocky</i> 2016/06/24						SCALE SHEET 4:1
ND.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:						