



SK-22D32-GEI

Knob Type
GEI
VAA
PGA
GEE
VAC

L (mm)
~





P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

Refer to additional specifications

RATING	0.3A 30V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

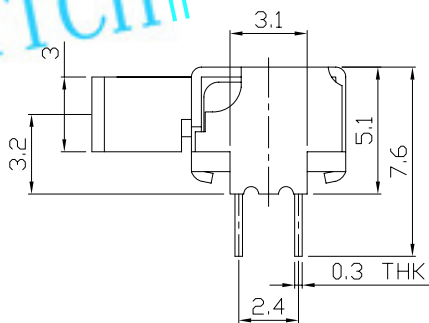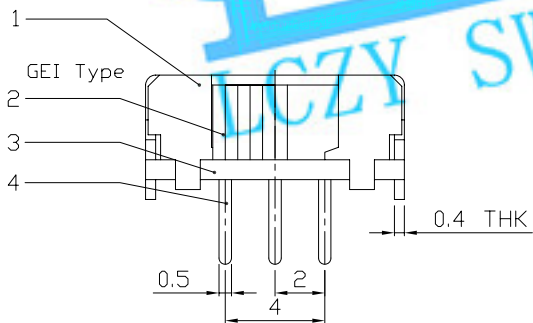

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED								
7					OVER 1.5mm: ±0.2mm	MAT'L									
6	CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD		SEE NOTE	TITLE: SLIDE SWITCH / HORIZONTAL		PART NO: SK-22D32						
5	SPRING PLATE	SUS	1	NATURAL											
4	TERMINAL	BRASS STRIP	6	Ag PLATED OVER Ni PLATED		FINISH	DR: <i>Ricky</i> 2015/12/11		DWG NO: ADJ-22D32						
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE									
2	KNOB	POM	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	CHKD: <i>Ricky</i> 2015/12/11		SCALE SHEET REV. CUSTOMER 4:1 1/1 A DRAWING						
1	FRAME	STEEL STRIP	1	Ni PLATED											
NO.	PARTS	MATERIAL	Q'TY	FINISHING											
1		2		3		4		5		6		7			