


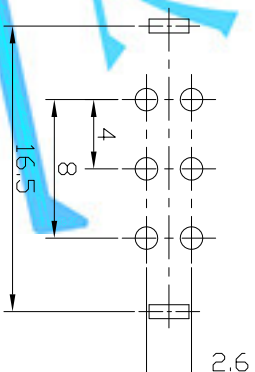
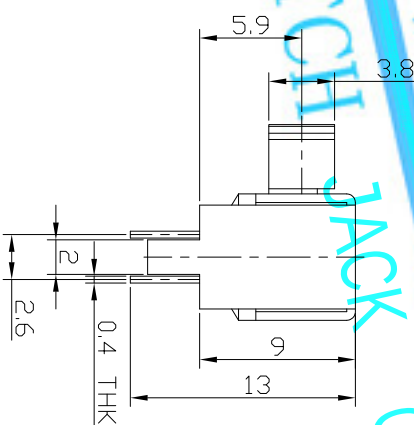
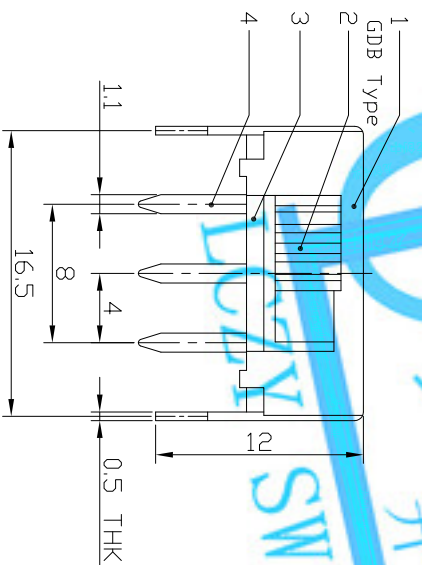


DIMENSIONS

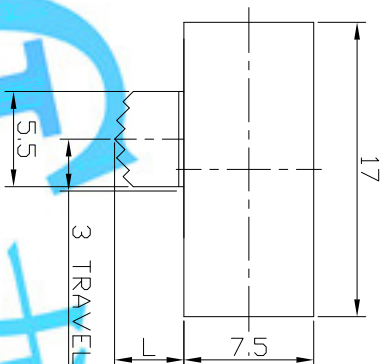

MODEL CODE

SK-22F02-GDB



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	200±80gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK) CO., LIMITED					
		TITLE:	PART NO.: SK-22F02		
		SLIDE SWITCH / HORIZONTAL			
		DR: Rocky 2016/06/24	DWG NO:	ADL -22F02	
		CHECKD: Rocky 2016/06/24	SCALE	SHEET	REV.
		APPD:	2:1	1/1	A
		CUSTOMER DRAWING			
UNITS mm		MAT'L			
WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm		SEE NOTE			
		FINISH			
		SEE NOTE			
Q'TY					
					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCORATE INNOVICH INC. OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCORATE INNOVICH INC.					
ND.	PARTS	MATERIAL	Q'TY	FINISHING	
1	FRAME	STEEL STRIP	1	N: PLATED	
2	KNOB	POM	1	BLACK	
3	BASE	PHENOLIC RESIN	1	BLACK	
4	TERMINAL	BRASS STRIP	6	AG PLATED	
5	CONTACT	BRASS STRIP	2	AG PLATED	
6	SPRING	STEEL WIRE	2	NATURAL	
7					
8					

LONGCHUANG ZHONGYE (HK)CO.,LIMITED