

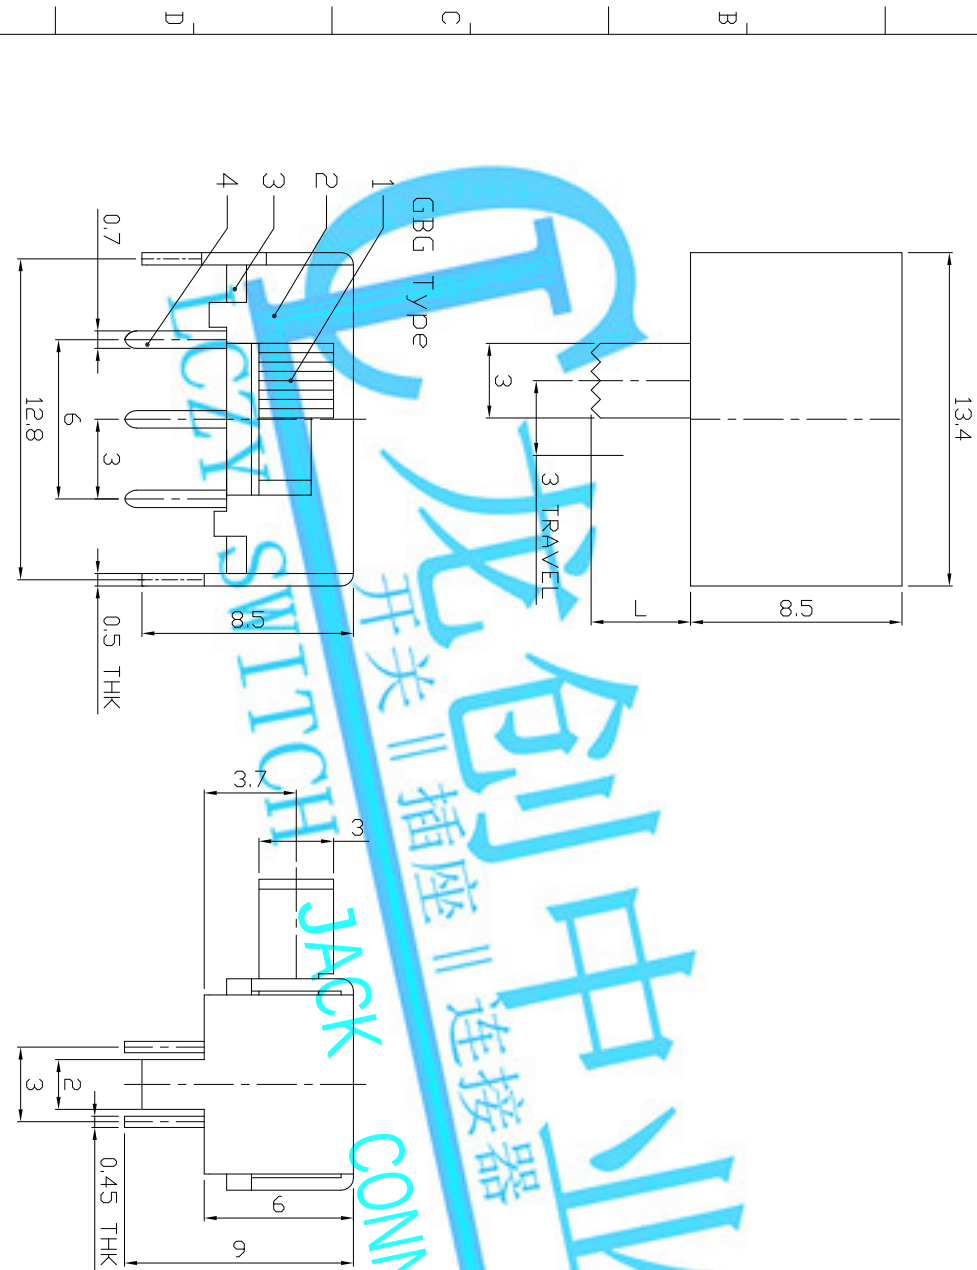


DIMENSIONS

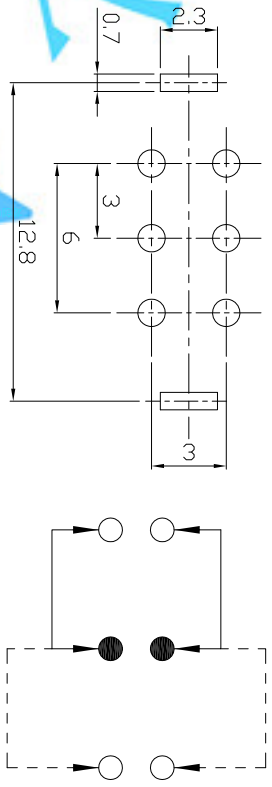

MODEL CODE

SK-22F14-GBG

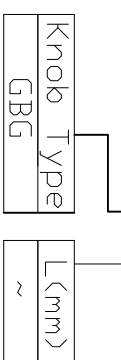

P.C.B. LAYOUT

BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

UNITS		mm	
WITHIN 1.5mm: ±0.1mm		OVER 1.5mm: ±0.2mm	
8			
7			
6	CONTACT	BRASS STRIP	2
5	SPRING	STEEL WIRE	2
4	TERMINAL	BRASS STRIP	6
3	BASE	PHENOLIC RESIN	1
2	FRAME	STEEL STRIP	1
1	KNDB	PDM	1
ND.	PARTS	MATERIAL	Q'TY

FINISHING		Q'TY	
NATURAL		1	
Ni PLATED		1	
BLACK		1	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.		APPD.	
SEE NOTE		3/1	

TITLE:		PART NO.:	
SLIDE SWITCH / HORIZONTAL		SK-22F14	

DWG NO.:		ADL-22F14	
CHKD: <i>Sticky</i>		SCALE SHEET REV.	
2016/06/27		1/1	

CUSTMER DRAWING		A	
-----------------	--	---	--