



MODEL CODE SK-22F16-G

[illegible]

BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	200±80gf
OPERATING LIFE(cycles)	10,000

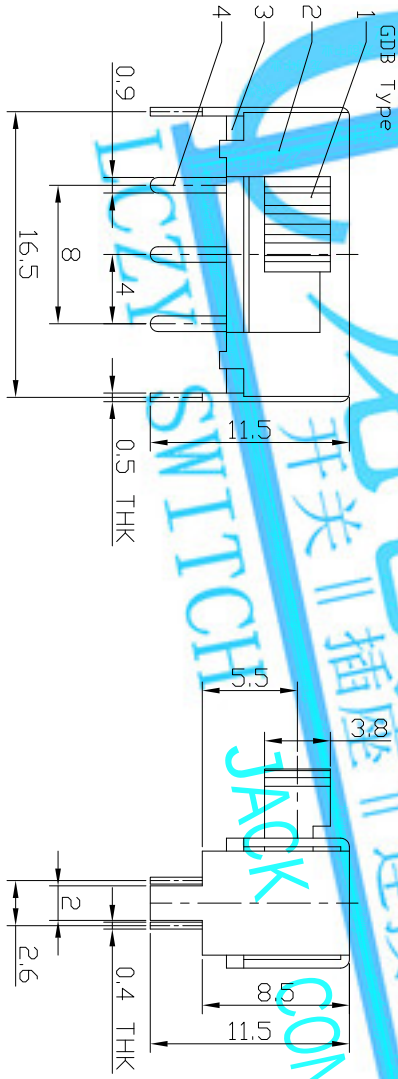

LONGCHUANG ZHONGYE (HK)CO.,LIMITED