


Knob Type	L(mm)
GfN	~

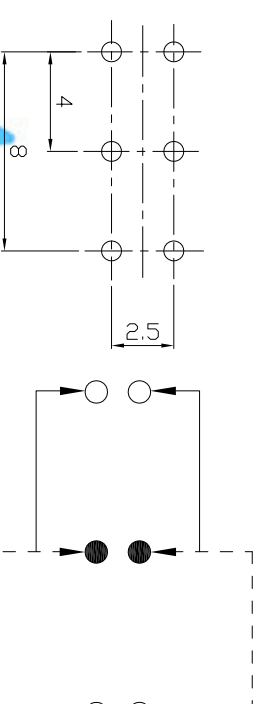


P.C.B LAYOUT

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

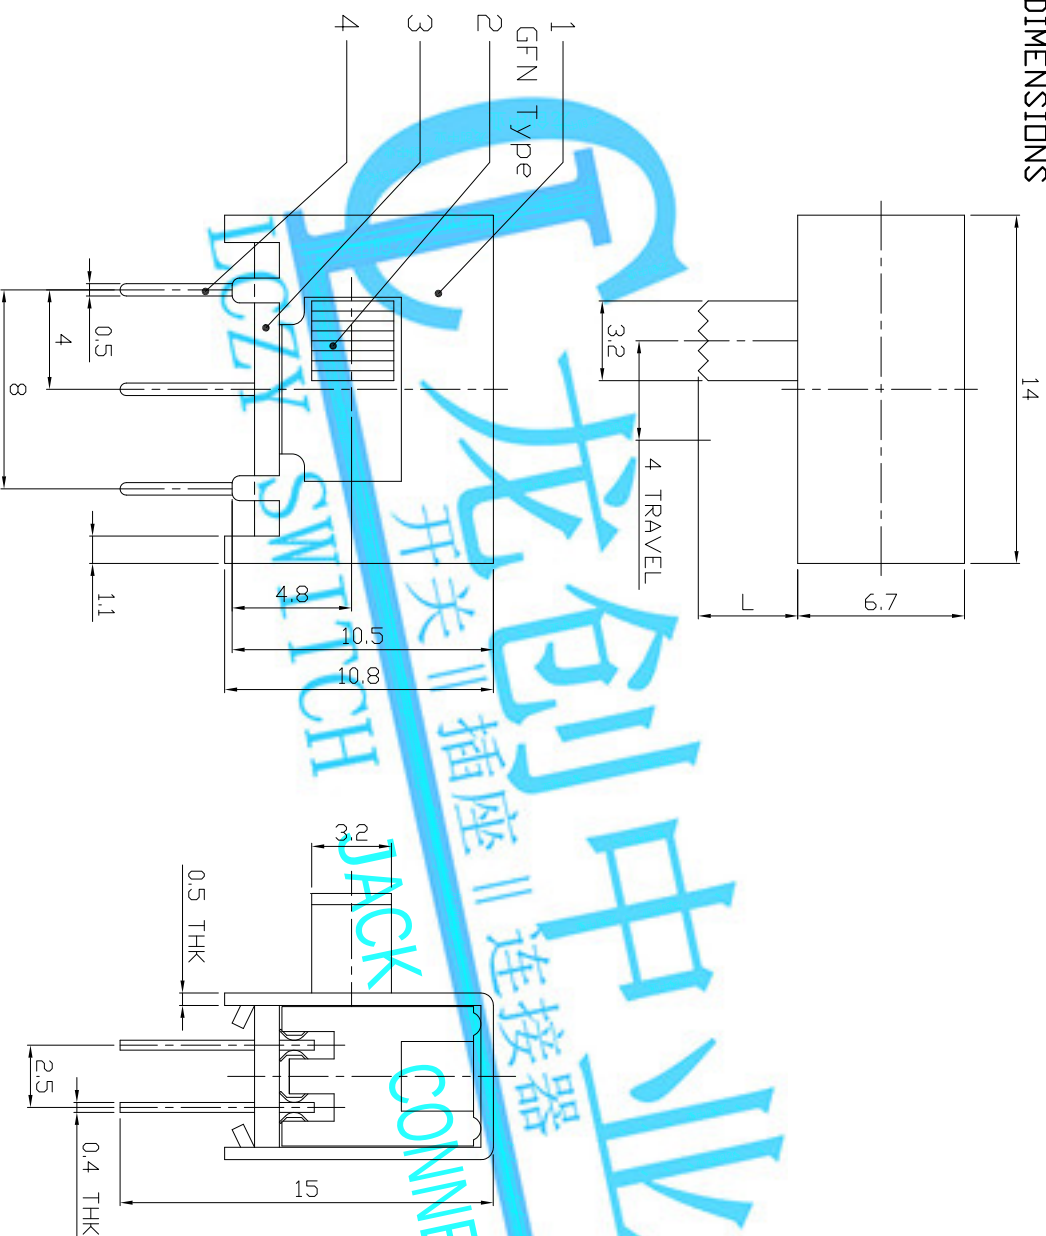

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO:		SK-22H02					
SLIDE SWITCH / HORIZONTAL		DWG NO:							
DR: Rocky		2016/06/27		ADL-22H02					
CHKD: Rocky		2016/06/27							
APPD:		SCALE		SHEET		REV.		CUSTOMER DRAWING	
		3:1		1/1		A			
UNITS mm									
MAT'L									
SEE NOTE									
FINISH									
SEE NOTE									
WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm									
NATURAL									
1									
STEEL WIRE									
STEEL BALL									
1									
STEEL									
STEEL STRIP									
2									
CONTACT CLIP									
BRASS STRIP									
6									
TERMINAL									
PHENOLIC RESIN									
1									
BASE									
BLACK									
1									
PDM									
KNOB									
1									
STEEL STRIP									
1									
FRAME									
MATERIAL									
Q'TY									
FINISHING									
PARTS									
NO.									