





RoHS
Compliant
2002/95/EC

MODEL CODE


SK-22H11- GEP

REV.	ECN.	NO.	APPD.


DIMENSIONS

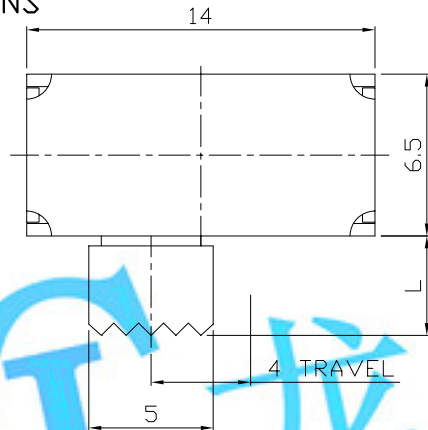



Knob Type	L(mm)
GEP	~
GEG	~

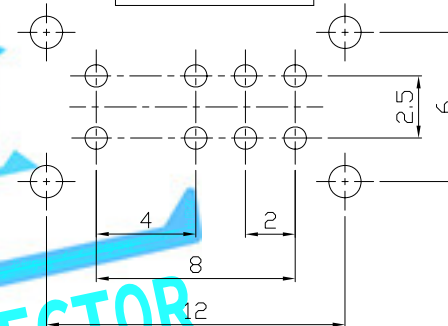

P.C.B LAYOUT
BOTTOM VIEW

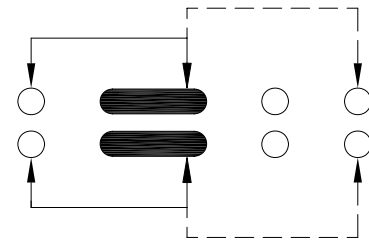

CIRCUIT DIAGRAM

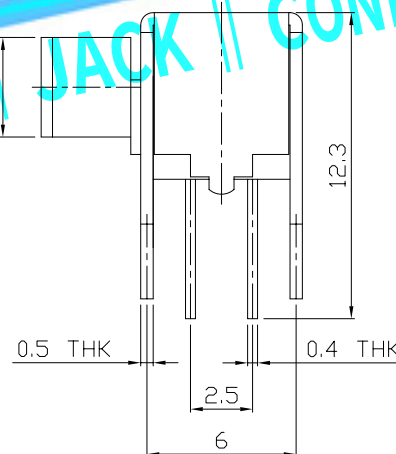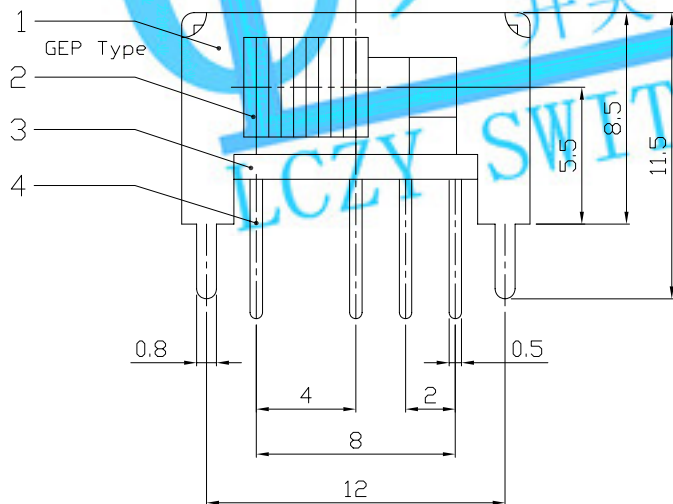

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 30V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8					
7	CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD	
6	SPRING	STEEL WIRE	1	NATURAL	
5	STEEL BALL	STEEL	1	NATURAL	
4	TERMINAL	BRASS STRIP	8	Ag PLATED OVER Ni PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	KNOB	POM	1	BLACK	
1	FRAME	STEEL STRIP	1	Ni PLATED	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm	UNITS mm
OVER 1.5mm: ±0.2mm	MAT'L
	SEE NOTE
	FINISH
	SEE NOTE
	Q'TY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
TITLE: SLIDE SWITCH / HORIZONTAL			PART NO.: SK-22H11		
DR: Ricky 2015/12/16			DWG NO.: ADJ-22H11		
CHKD: Ricky 2015/12/16					
APPD:			SCALE	SHEET	REV.
			3:1	1/1	A
			CUSTOMER DRAWING		