
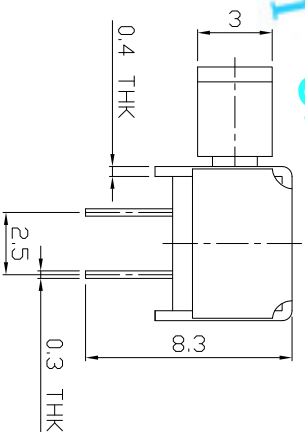
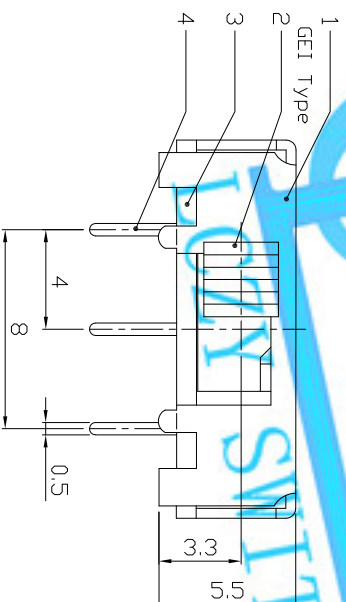
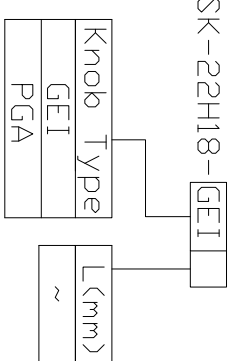
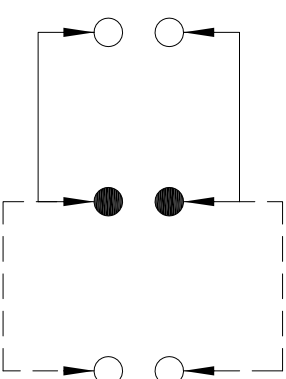




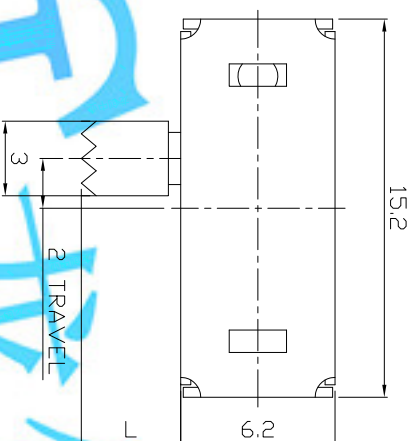

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250 $\pm$ 100gf
OPERATING LIFE(cycles)	10,000

8						LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	TITLE: PART NO.: SLIDE SWITCH / HORIZONTAL SK-22H18		
6	SPRING PLATE	SUS	1	NATURAL		MAT'L			
5	CONTACT CLIP	PBS STRIP	1	AG PLATED		SEE NOTE	CHKD: <i>Guoqiy</i> 2016/06/23 DWG NO: ADL-22H18		
4	TERMINAL	BRASS STRIP	6	AG PLATED		FINISH			
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	DR: <i>Guoqiy</i> 2016/06/23 SCALE SHEET REV.: 3:1 1/1 A		
2	KNOB	PDM	1	BLACK		Q'TY			
1	FRAME	STEEL STRIP	1	NI PLATED			APPD: CUSTOMER DRAWING		
NO.	PARTS	MATERIAL	Q'TY	FINISHING					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED INC.									