





MODEL CODE



SK-22H19- GEP

REV.	ECN.	NO.	APPD.

DIMENSIONS

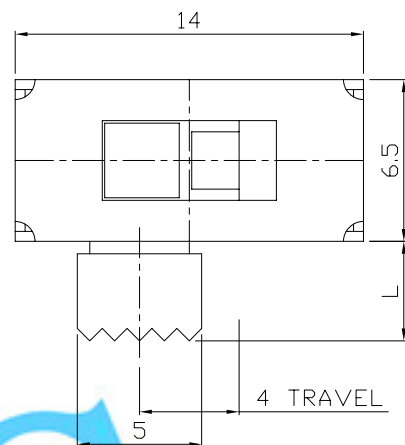

Knob Type	L(mm)
GEP	~
GEG	

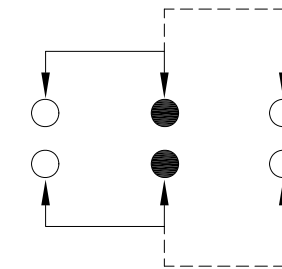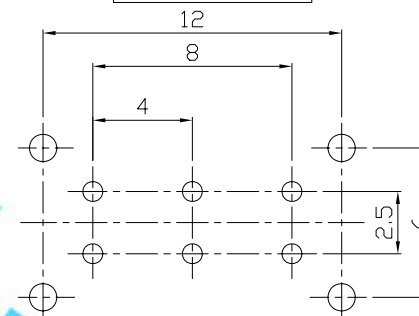

P.C.B LAYOUT


BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 30V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE:	PART NO:			
5	CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD			SLIDE SWITCH / HORIZONTAL	SK-22H19			
4	TERMINAL	BRASS STRIP	6	Ag PLATED OVER Ni PLATED		FINISH	DR:	DWG NO:			
3	BASE	PHENOLIC RESIN	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	<i>Ricky</i> 2015/12/16	ADJ-22H19			
2	KNOB	POM	1	BLACK		Q'TY	CHKD:				
1	FRAME	STEEL STRIP	1	Ni PLATED							
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:	3:1	1/1	A	CUSTOMER DRAWING