

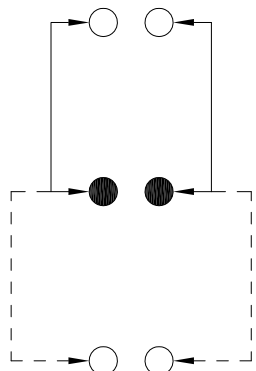
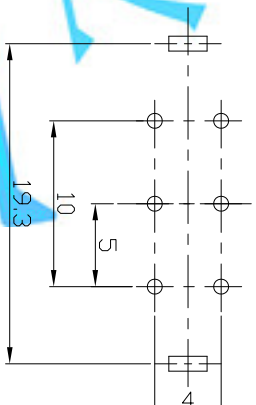
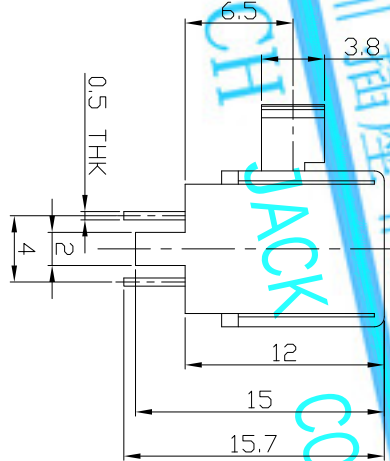


DIMENSIONS

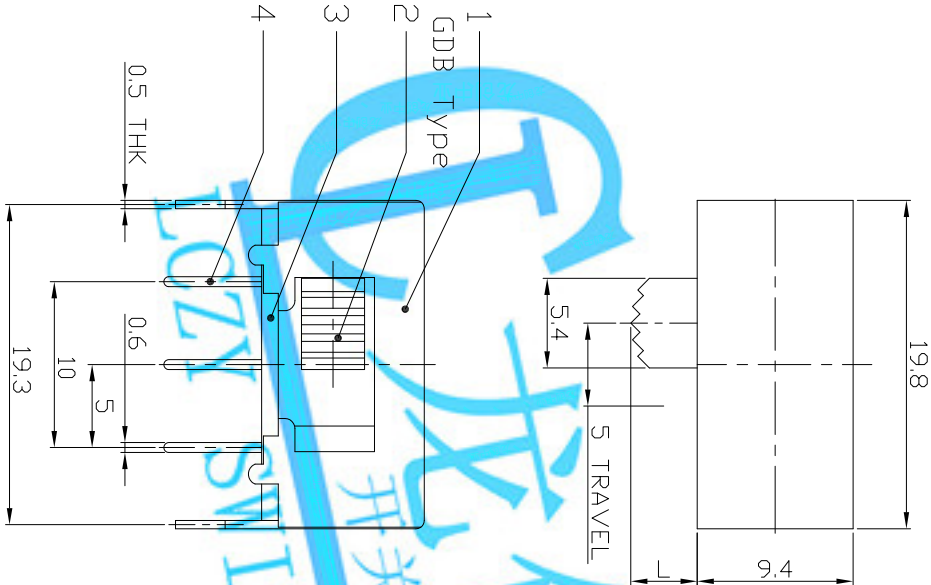

MODEL CODE

SK-22 J03-GDB



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
7	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE	TITLE: SLIDE SWITCH / HORIZONTAL
6	CONTACT CLIP	PBS STRIP	2	AG PLATED		FINISH	SEE NOTE	DR: 2016/06/28
5	TERMINAL	BRASS STRIP	6	AG PLATED		SEE NOTE	CHKD: 2016/06/28	DWG NO: ADL-22 J03
4	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY	APPD: 2016/06/28	SCALE SHEET 1/1
3	KNDB	POM	1	BLACK		Q'TY	APPD: 2016/06/28	REV. A
2	FRAME	STEEL STRIP	1	NI PLATED		Q'TY	APPD: 2016/06/28	CUSTOMER DRAWING
1	PARTS	MATERIAL	Q'TY	FINISHING		Q'TY	APPD: 2016/06/28	