
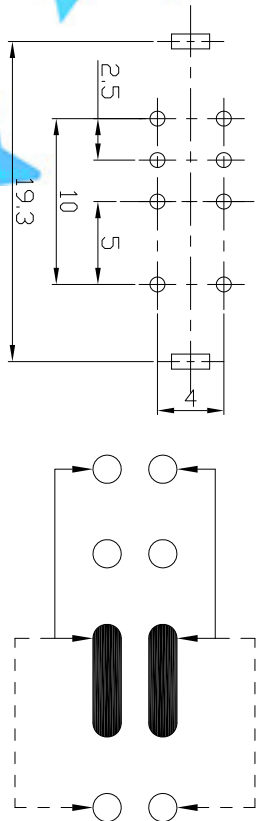
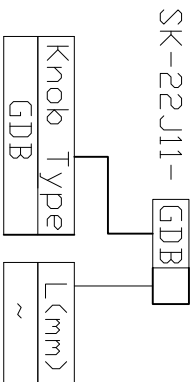
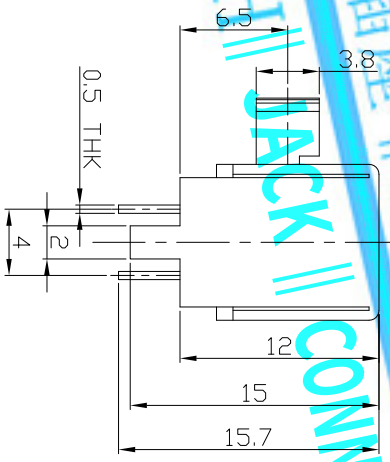


DIMENSIONS

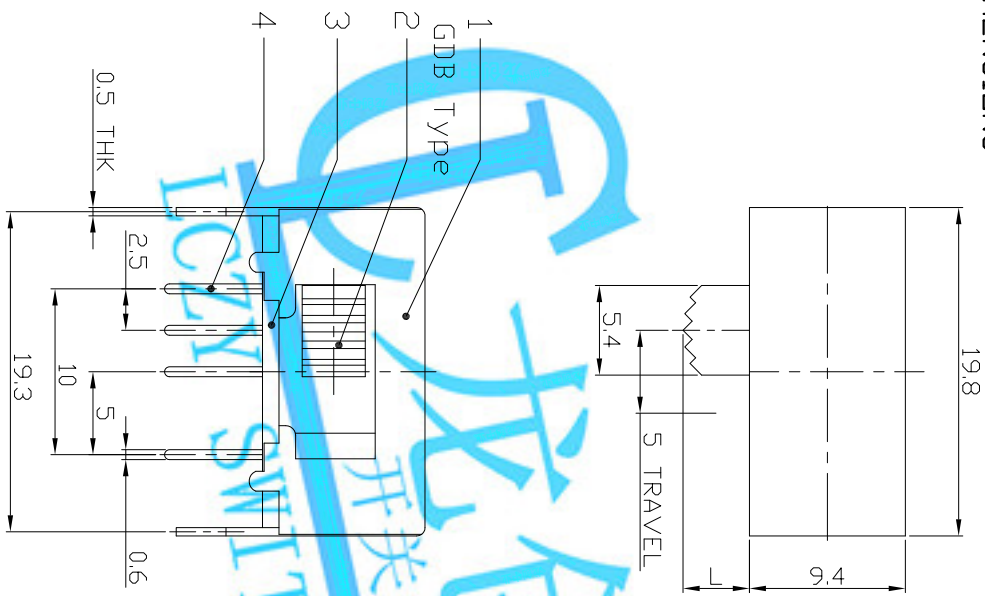

P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	CONTACT CLIP	PBS STRIP	2	AG PLATED			SEE NOTE				
5	TERMINAL	BRASS STRIP	8	AG PLATED			FINISH				
4	BASE	PHENOLIC RESIN	1	NATURAL			SEE NOTE				
3	KNOB	POM	1	BLACK			DR: <i>Rocky</i> 2016/06/28	DWG NO: ADL-22 J11			
2	FRAME	STEEL STRIP	1	NI PLATED			CHKD: <i>Rocky</i> 2016/06/28	SCALE	SHEET	REV.	CUSTOMER DRAWING
1	PARTS	MATERIAL	Q'TY	FINISHING			APPD:	21	1/1	A	
			1								