
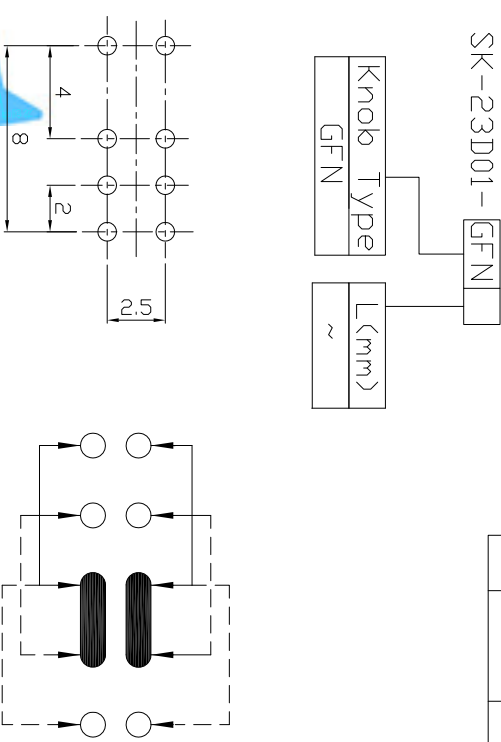


DIMENSIONS

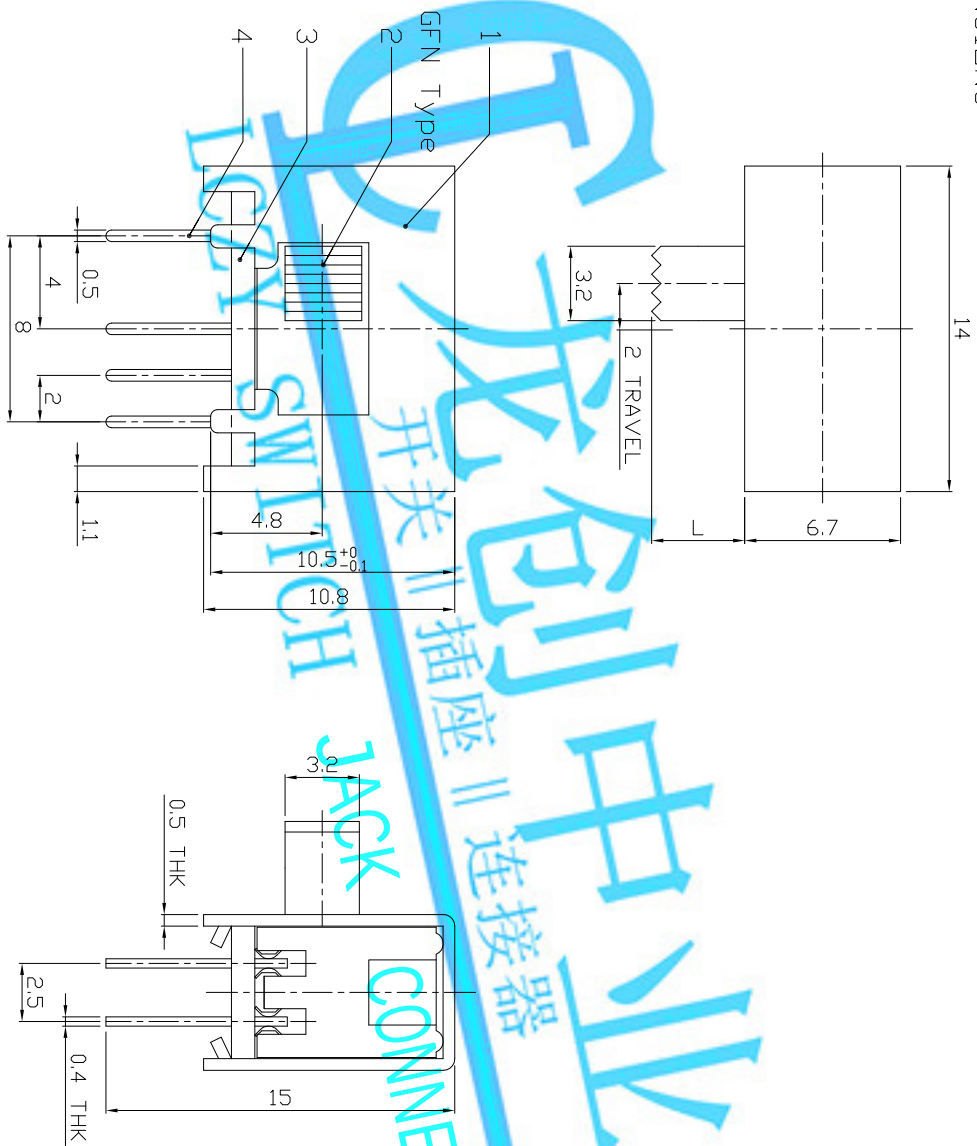

PCB LAYOUT
BOTTOM VIEW

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL		MAT'L				
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED		SEE NOTE				
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH				
4	TERMINAL	BRASS STRIP	8	Ag PLATED		SEE NOTE				
3	BASE	PHENOLIC RESIN	1	NATURAL		DR: <i>Rocky</i> 2016./07/11	PART NO.: SK-23D01			
2	KNDB	POM	1	BLACK		CHKD: <i>Rocky</i> 2016./07/11				
1	FRAME	STEEL STRIP	1	Ni PLATED		SCALE SHEET				
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:	3/1	1/1	A	CUSTOMER DRAWING