


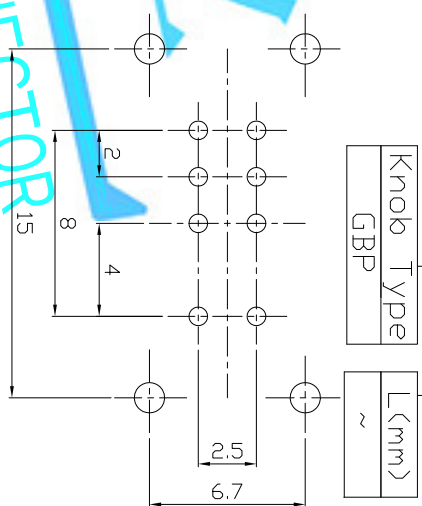
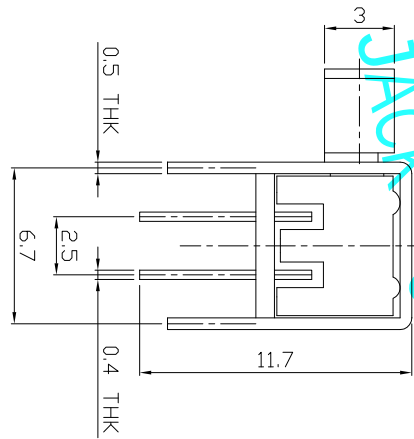


DIMENSIONS

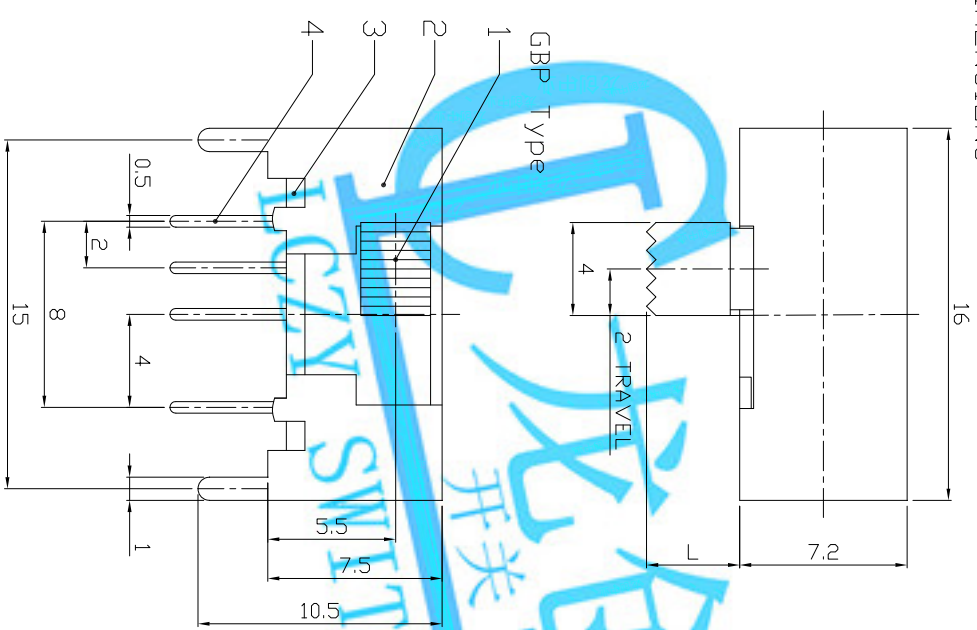

MODEL CODE
SK-23D05-GBP



P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	CONTACT CLIP	PBS STRIP	2	Ag PLATED	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL		MAT'L	TITLE: SK-23D05			
6	STEEL BALL	STEEL	1	NATURAL		SEE NOTE	PART NO.: SK-23D05			
5	TERMINAL	BRASS STRIP	8	Ag PLATED		FINISH	SLIDE SWITCH / HORIZONTAL			
4	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	DWG NO.: ADL-23D05			
3	FRAME	STEEL STRIP	1	NI PLATED		CHKD: 2016/07/11	SCALE SHEET REV. 1/1			
2	KNDB	POM	1	BLACK		Q'TY	APPLD: 3/1			
1	PARTS	MATERIAL	Q'TY	FINISHING		APPLD:	CUSTOMER DRAWING			