

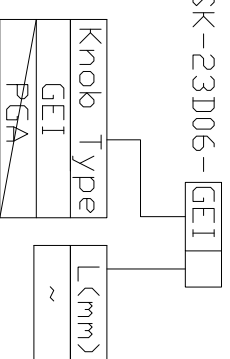

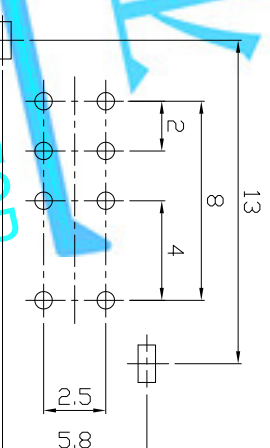



DIMENSIONS

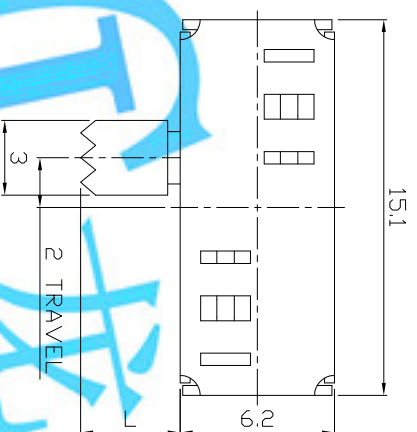

P.C.B LAYOUT

BOTTOM VIEW

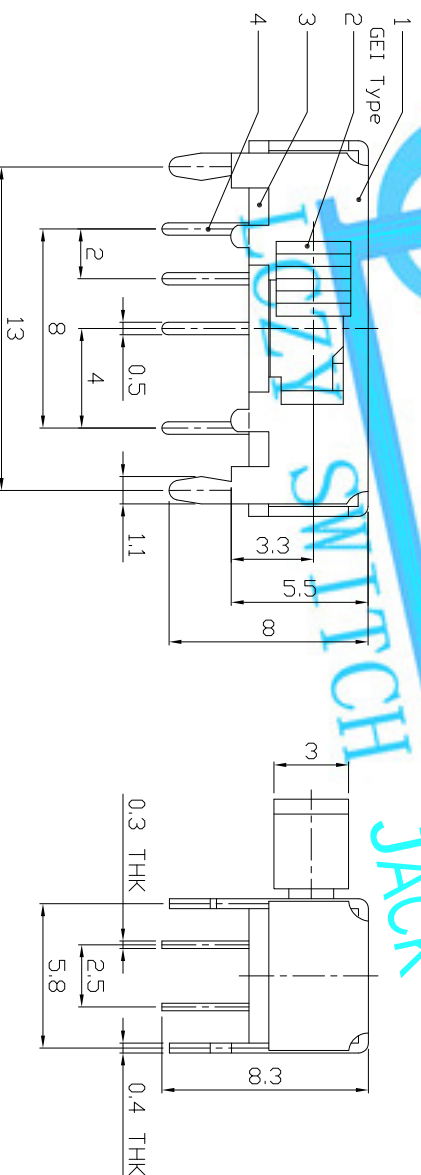

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250 $\pm$ 100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO:		DRAWG NO: SK-23D06					
SLIDE SWITCH / HORIZONTAL									
DR: Rocky 2016/07/11				ADL-23D06					
CHKD: Rocky 2016/07/11									
APPD:		SCALE		SHEET		REV.		CUSTOMER DRAWING	
		3:1		1/1		A			
WITHIN 1.5mm: ±0.1mm									
OVER 1.5mm: ±0.2mm		MAT'L		UNITS mm					
SEE NOTE		FINISH		SEE NOTE					
SEE NOTE		Q'TY		Q'TY					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.									
NATURAL		NATURAL		NATURAL					
AG PLATED		AG PLATED		AG PLATED					
PBS STRIP		PBS STRIP		PBS STRIP					
PBS STRIP		PBS STRIP		PBS STRIP					
NATURAL		NATURAL		NATURAL					
BLACK		BLACK		BLACK					
N PLATED		N PLATED		N PLATED					
STEEL STRIP		STEEL STRIP		STEEL STRIP					
PDM		PDM		PDM					
KNOB		KNOB		KNOB					
FRAME		FRAME		FRAME					
PARTS		PARTS		PARTS					
ND.		ND.		ND.					