

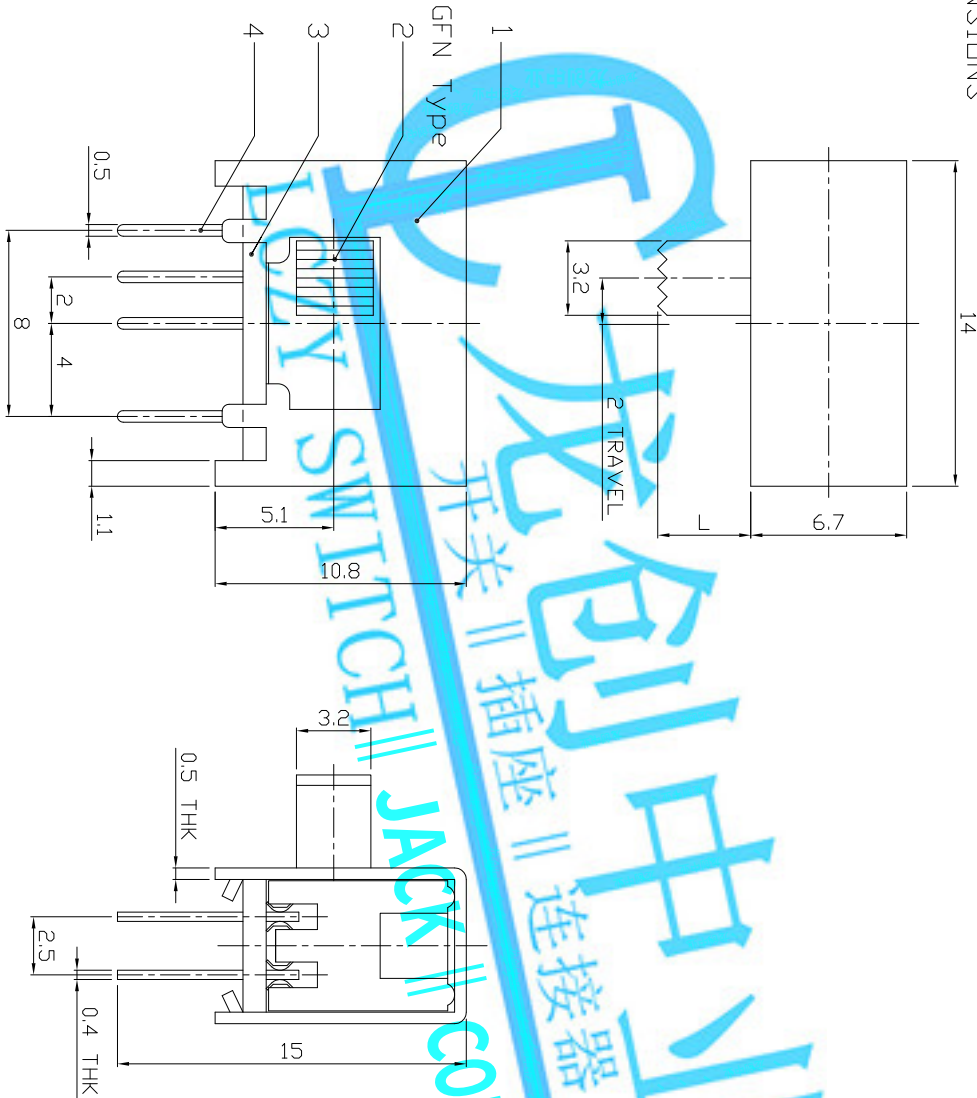



DIMENSIONS



MODEL CODE

SK-23D21-GFN



P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	mm					
6	SPRING	STEEL WIRE	1	NATURAL		MAT'L					
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		SEE NOTE					
4	TERMINAL	BRASS STRIP	8	Ag PLATED		FINISH					
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	DR:	SLIDE SWITCH / HORIZONTAL		PART NO:	SK-23D21
2	KNDB	PDM	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.		<i>Ricky</i> 2016/07/11	DWG NO:	ADL-23D21		
1	FRAME	STEEL STRIP	1	Ni PLATED			<i>Ricky</i> 2016/07/11	CHKD:	SCALE	SHEET	REV.
ND.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:	3/1	1/1	A	DRAWING