
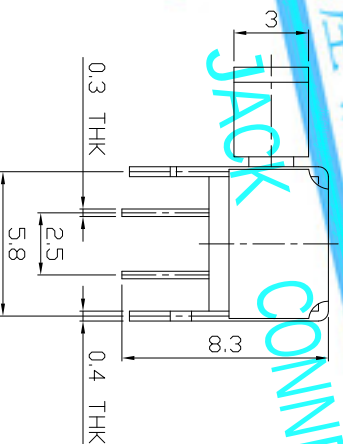
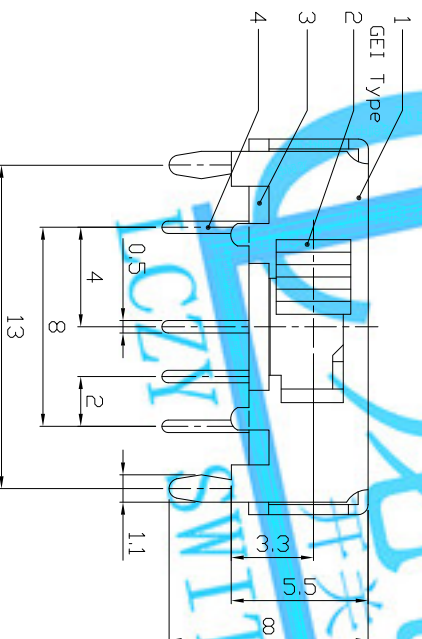

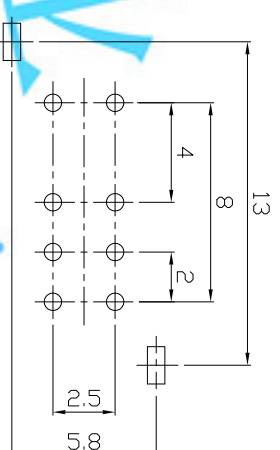



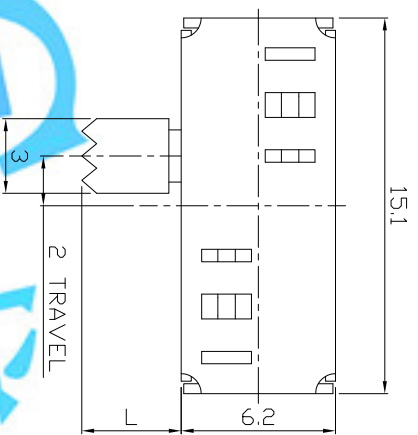

P.C.B LAYOUT **CIRCUIT DIAGRAM**

BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO:		DWG NO: SK-23D26					
SLIDE SWITCH / HORIZONTAL									
DR: Rocky 2016/07/11		DWG NO: ADL-23D26		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED INC.					
CHKD: Rocky 2016/07/11									
APPD:		SCALE SHEET REV.		CUSTOMER DRAWING					
		3:1 1/1 A							
UNITS mm		Q'TY		WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm					
MAT'L									
SEE NOTE		FINISH							
SEE NOTE		SEE NOTE							
OVER 1.5mm: ±0.2mm									
NATURAL		AG PLATED							
1		AG PLATED							
SUS		PBS STRIP							
1									
NATURAL									
BRASS STRIP									
PHEINDIC RESIN									
1		BLACK							
1		NI PLATED							
STEEL STRIP									
MATERIAL									
Q'TY									
FINISHING									
1									
FRAME									
KNOB									
1									
PDM									
1									
BASE									
1									
TERMINAL									
1									
CONTACT CLIP									
1									
SPRING PLATE									
1									
7									
E									
8									
ND									