REV.	ECN. NO.	APPD.

Pb Process Capable

RoHS Compliant 2002/95/EC

DIMENSIONS

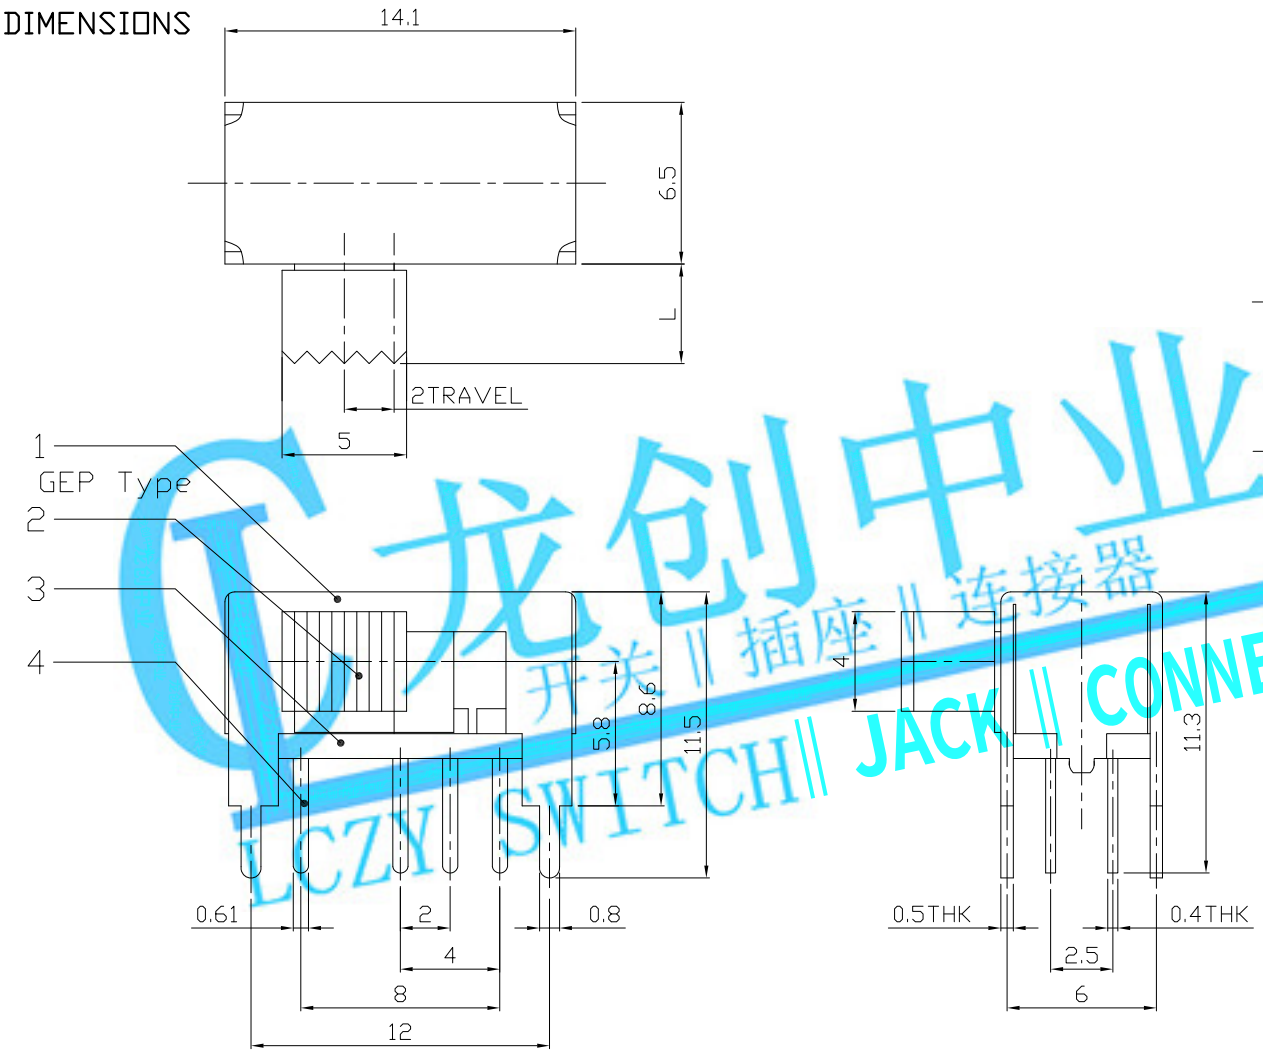

MODEL CODE

SK-23D29-GEP

Knob Type	L(mm)
GEP	~

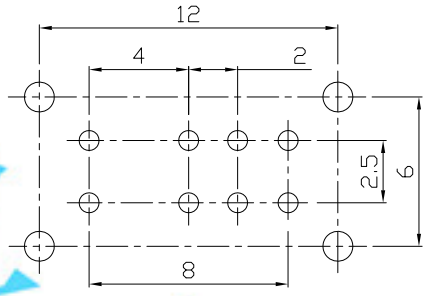

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

龙创中业
开关‖插座‖连接器
LCZY SWITCH‖ JACK‖ CONNECTOR

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7	SPRING	SUS WIRE	1	NATURAL
6	SUS BALL	SUS	1	NATURAL
5	CONTACT	PBS	2	Ag PLATED
4	TERMINAL	BRASS STRIP	1	Ag PLATED
3	TERMINAL BASE	PHENOLIC RESIN	1	NATURAL
2	COVER	MILD STEEL	1	Ni PLATED
1	KNOB	POM	1	BLACK

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm
MAT'L SEE NOTE
FINISH SEE NOTE
Q'TY

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE: SLIDE SWITCH / HORIZONTAL
PART NO.: SK-23D29
DR: Ricky 2016/08/11
DWG NO.: AZJ-23D29
CHKD: Ricky 2016/08/11
APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
3:1	1/1	A	