
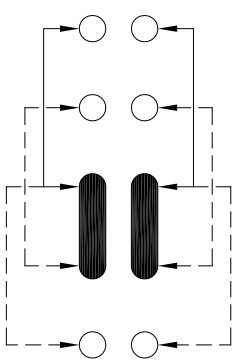
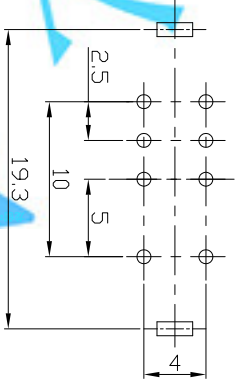
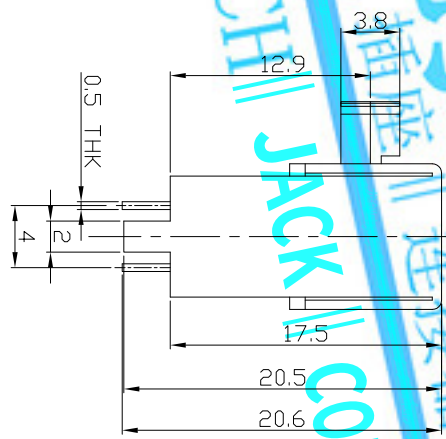


DIMENSIONS

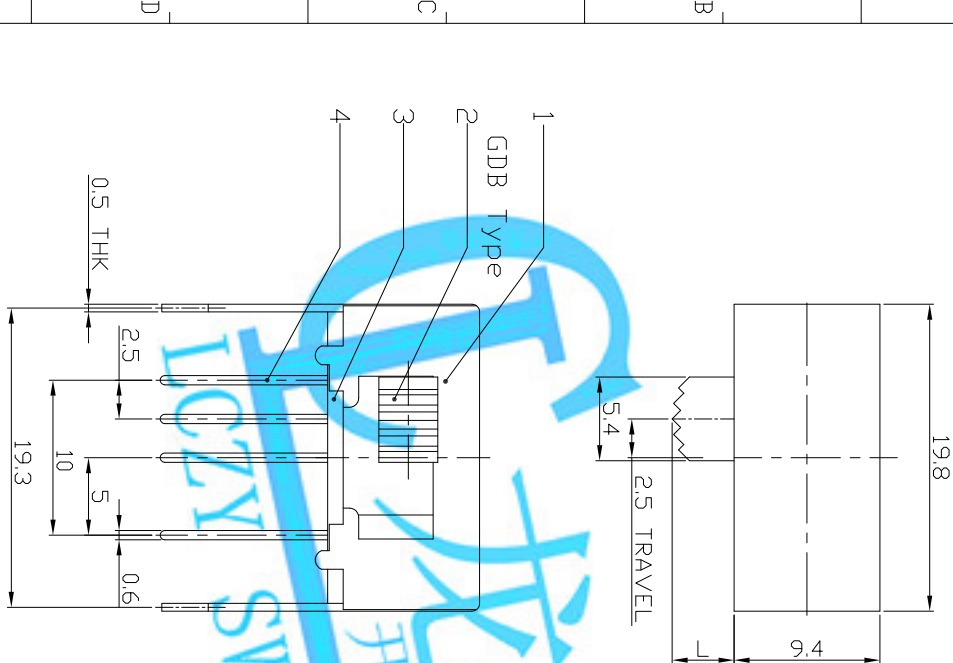

MODEL CODE

SK-23E03-GDB

Knob Type
GDB

L(mm)
~

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2.5mm
OPERATING FORCE	200±80gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	UNITS mm				
6	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	UNITS mm				
5	CONTACT CLIP	PBS STRIP	2	AG PLATED	OVER 1.5mm: ±0.2mm	UNITS mm				
4	TERMINAL	BRASS STRIP	8	AG PLATED	OVER 1.5mm: ±0.2mm	UNITS mm				
3	BASE	PHENOLIC RESIN	1	NATURAL	OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
2	KNOB	POM	1	BLACK	OVER 1.5mm: ±0.2mm	UNITS mm				
1	FRAME	STEEL STRIP	1	NI PLATED	OVER 1.5mm: ±0.2mm	UNITS mm				
ND.	PARTS	MATERIAL	Q'TY	FINISHING	OVER 1.5mm: ±0.2mm	UNITS mm				
1							LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
2										
3										
4										
5										