

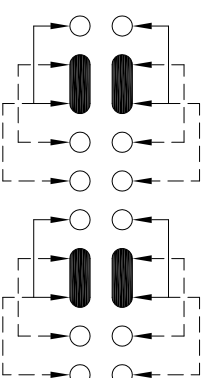
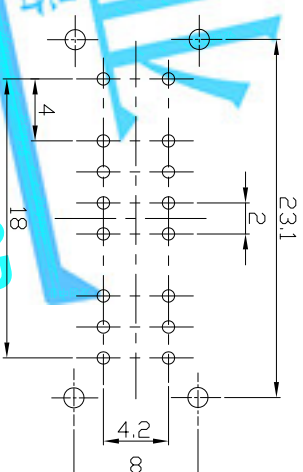
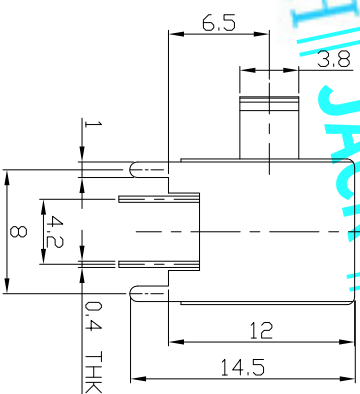
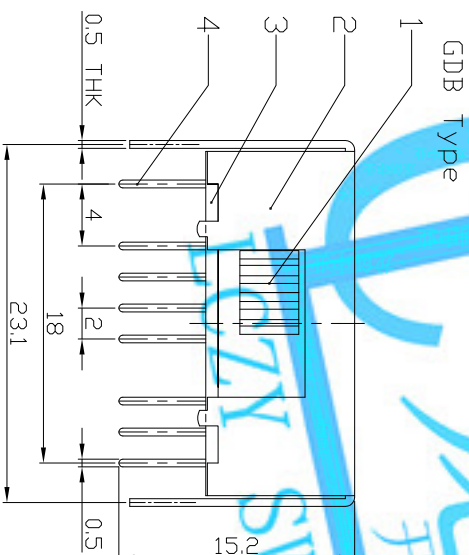


DIMENSIONS

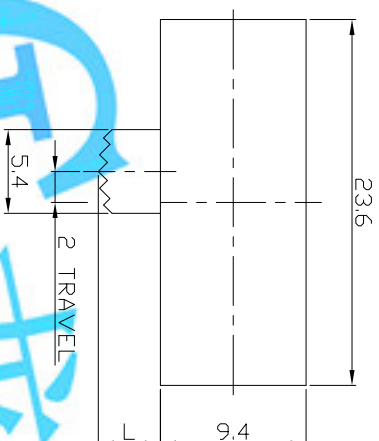

MODEL CODE

SK-43D01-GDB



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO:		SK-43D01					
SLIDE SWITCH / HORIZONTAL									
DR: <i>Stucky</i> 2016/07/14		DWG NO:		ADL-43D01					
CHKD: <i>Stucky</i> 2016/07/14									
APPD:		SCALE		SHEET		REV.		CUSTOMER DRAWING	
		2:1		1/1		A			
UNITS		mm							
WITHIN 1.5mm: ±0.1mm		MAT'L							
OVER 1.5mm: ±0.2mm		SEE NOTE							
		FINISH							
		SEE NOTE							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INVENTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INVENTECH INC.		Q'TY							
									
ND.		PARTS		MATERIAL		Q'TY		FINISHING	
1		KNOB		PDM		1		BLACK	
2		FRAME		STEEL STRIP		1		NI PLATED	
3		BASE		PHENOLIC RESIN		1		NATURAL	
4		TERMINAL		BRASS STRIP		16		AG PLATED	
5		CONTACT CLIP		PBS STRIP		4		AG PLATED	
6		SPRING		STEEL WIRE		1		TEMPER	
7		STEEL BALL		STEEL		1		NATURAL	
8									