
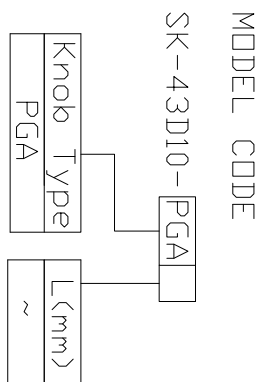
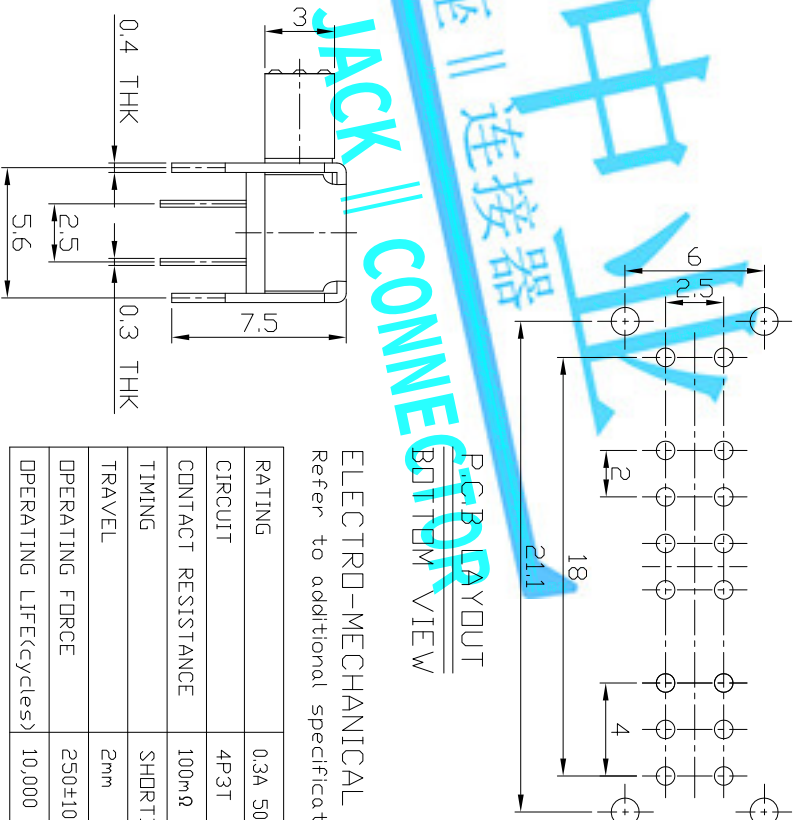


DIMENSIONS

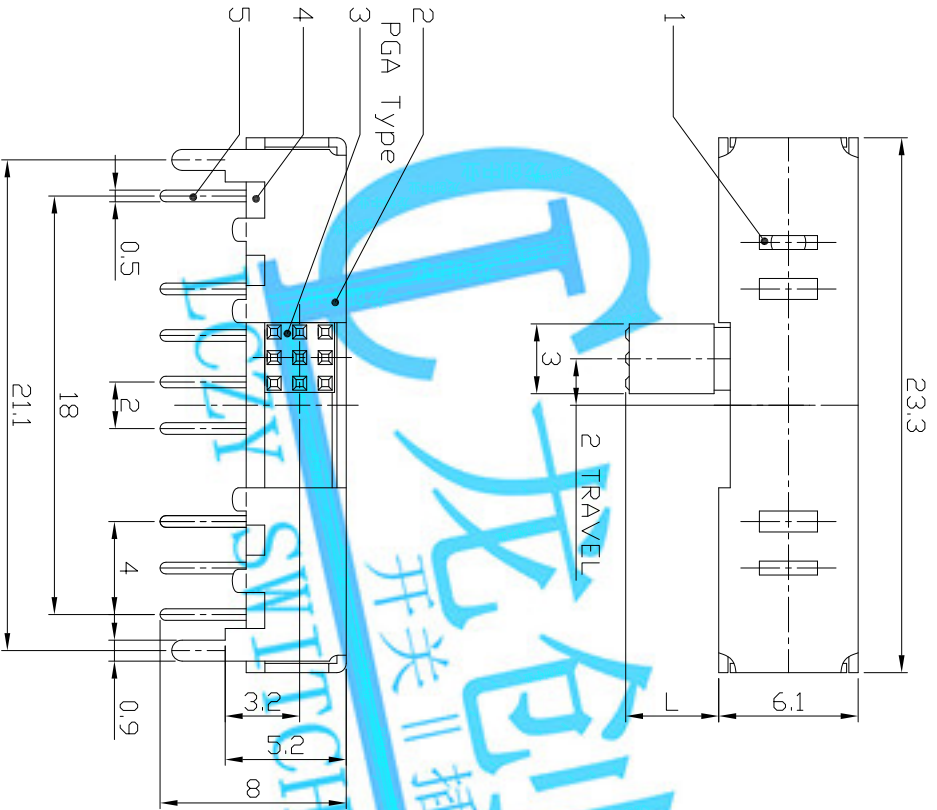

PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	CONTACT CLIP	PBS STRIP	4	Ag PLATED		SEE NOTE					
5	TERMINAL	BRASS STRIP	16	Ag PLATED		FINISH					
4	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE					
3	KNDB	PDM	1	BLACK		DR:	2016/07/18	DWG NO.:	ADL-43D10	SCALE	1/1
2	FRAME	STEEL STRIP	1	NI PLATED		CHKD:	2016/07/18	REV.	A	CUSTOMER	
1	SPRING PLATE	PBS STRIP	1	NATURAL		Q'TY		APPLD:		DRAWING	
NO.	PARTS	MATERIAL	Q'TY	FINISHING							