

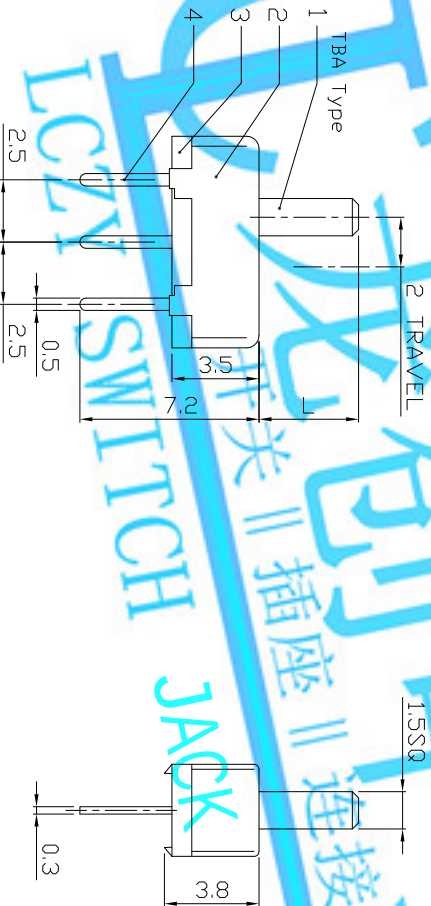


DIMENSIONS



MODEL CODE

SS-12D01 - TBA



P.C.B LAYOUT

BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	50mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6						SEE NOTE					
5	CONTACT	PBS	1	Ag PLATED		FINISH					
4	TERMINAL	BRASS	1	Ag PLATED		SEE NOTE					
3	TERMINAL CASE	PHENOLIC RESIN	1	NATURAL		DR:	Sticky 2016/08/03	DWG NO.:	AZJ-12D01	SCALE	1/1
2	COVER	MILD STEEL	1	NI PLATED		CHKD:	Sticky 2016/08/03	REV.:		REV.:	
1	KNDB	POM	1	BLACK		Q'TY		APPD:		CUSTOMER	
ND.	PARTS	MATERIAL	Q'TY	FINISHING						DRAWING	