

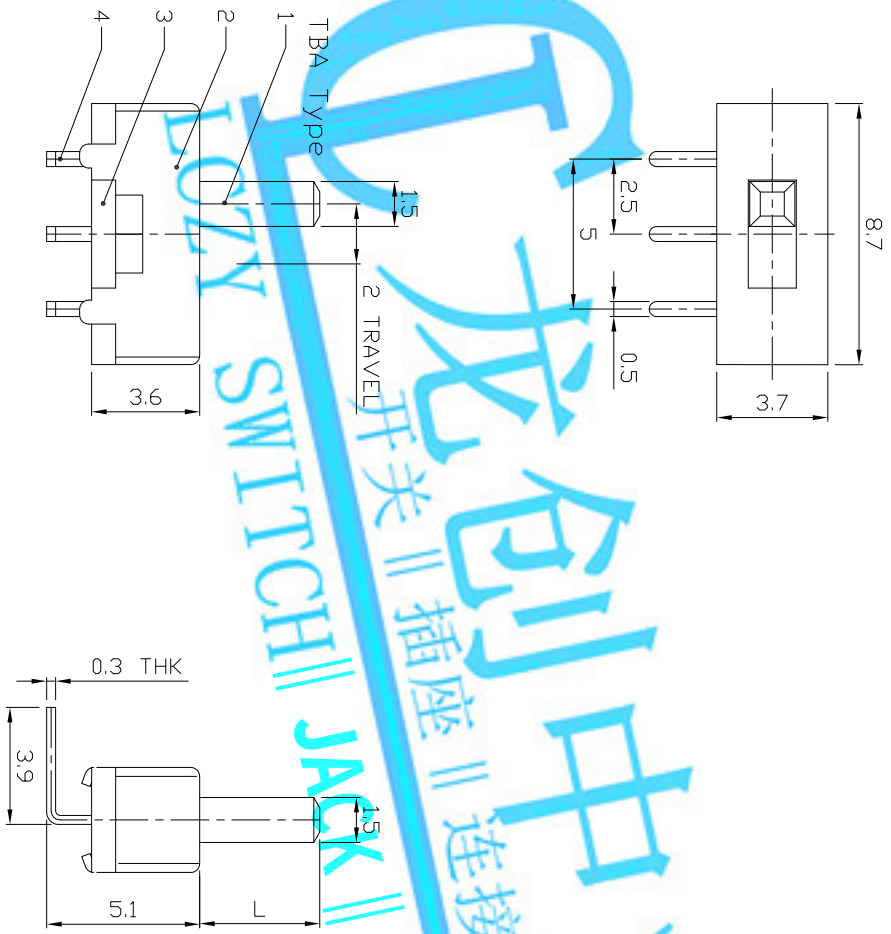



DIMENSIONS



MODEL CODE

SS-12D03-TBA



PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	150±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6						SEE NOTE					
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED		FINISH		TITLE:		PART NO.:	
4	TERMINAL	BRASS STRIP	3	Ag PLATED		SEE NOTE		SLIDE SWITCH / VERTICAL		SS-12D03	
3	BASE	PHENOLIC RESIN	1	NATURAL		DR:	Rocky 2015/07/07	DWG NO.:		ADL-12D03	
2	FRAME	STEEL STRIP	1	NI PLATED		CHKD:	Rocky 2015/07/07	SCALE		SHEET	REV.
1	KNDB	PDM	1	BLACK		Q'TY		S1	1/1	A	CUSTOMER DRAWING
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:					