

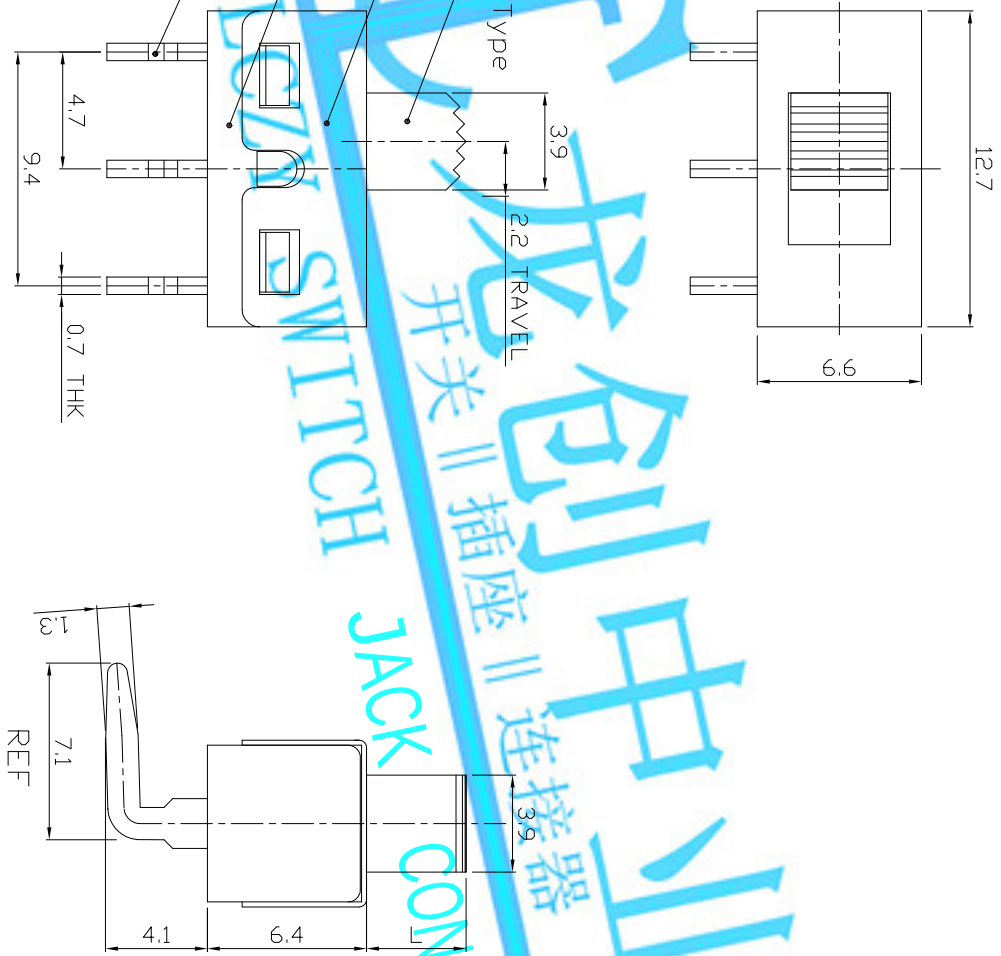


DIMENSIONS

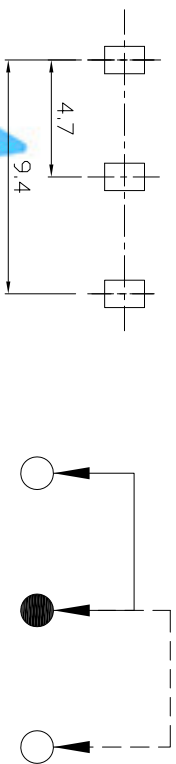

MODEL CODE

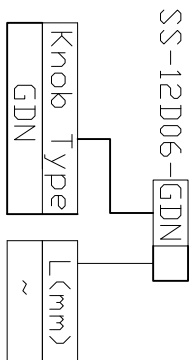

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	2A 125V AC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.2mm
OPERATING FORCE	200±50gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	CONTACT	BRASS STRIP	1	Ag PLATED		FINISH	SEE NOTE				
5	TERMINAL	BRASS STRIP	3	Ag PLATED		SEE NOTE					
4	CASE	PA66	1	BLACK		DR:	Rocky 2015/07/07				
3	COVER	SUS	1	NATURAL		CHKD:	Rocky 2015/07/07	PART NO.: SS-12D06			
2	KNDB	PA66	1	BLACK		Q'TY					
1	PARTS	MATERIAL	Q'TY	FINISHING		APPD:					
ND.								SCALE	SHEET	REV.	CUSTOMER DRAWING
1								3/1	1/1	A	