
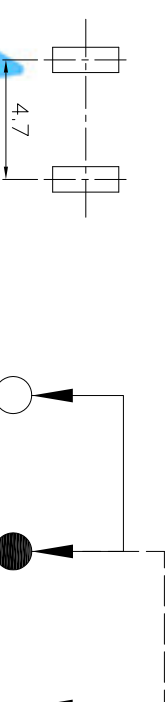
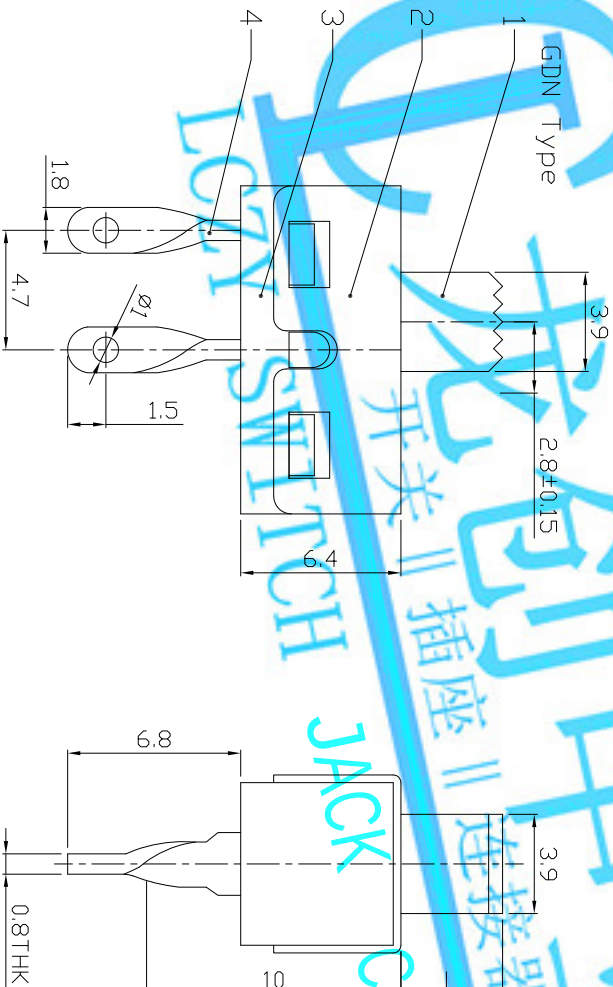


DIMENSIONS

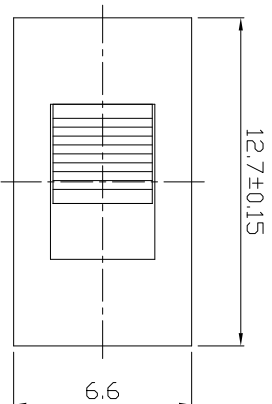

PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	2A 6V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	NON-SHORTING
TRAVEL	2.8 $\pm$ 0.15mm
OPERATING FORCE	500 $\pm$ 250gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:				PART NO:					
SLIDE SWITCH / VERTICAL				SS-12D08-N2P					
DR: <i>Stucky</i> 2016/02/17				DWG NO: ADL-12D08-N2P					
CHKD: <i>Stucky</i> 2016/02/17				SCALE SHEET REV. CUSTOMER					
APPD:				3:1		1/1		A DRAWING	
UNITS mm									
WITHIN 1.5mm: ±0.1mm				OVER 1.5mm: ±0.2mm					
MAT'L									
SEE NOTE				FINISH					
SEE NOTE				SEE NOTE					
Q'TY				Q'TY					
									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.									
ND. PARTS				Q'TY		FINISHING			
1 KNOB				1		BLACK			
2 COVER				1		NATURAL			
3 CASE				1		BLACK			
4 TERMINAL				2		AG PLATED			
5 CONTACT				1		NATURAL			
6 SPRING				1		NATURAL			
7 STEEL BALL				1		NATURAL			
8									

REV.	ECN.	ND.	APPD.