



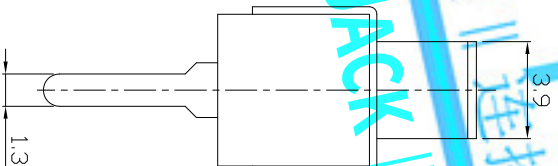
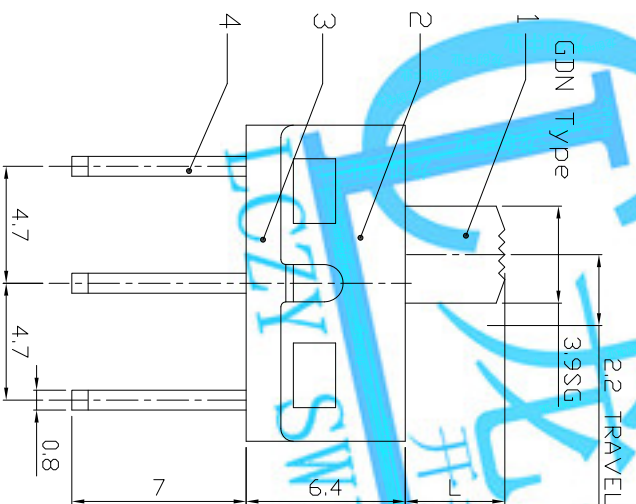


DIMENSIONS

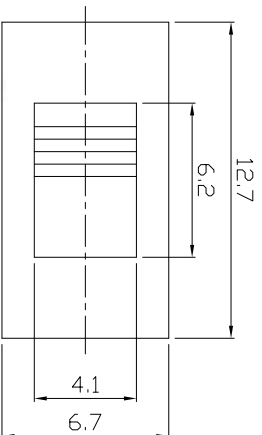

MODEL CODE

SS-12D10-GDN



P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	1.5A 125V AC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.2mm
OPERATING FORCE	300±150gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK) CO., LIMITED									
TITLE:		PART NO:		SS-12D10				CUSTOMER DRAWING	
SLIDE SWITCH / VERTICAL		DWG NO:							
DR: Ricky		2016/08/03		AZJ-12D10					
CHKD: Ricky		2016/08/03							
APPD:		SCALE		SHEET		REV.		CUSTOMER DRAWING	
		3:1		1/1		A			
UNITS		mm		WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm					
MAT'L									
SEE NOTE		FINISH		SEE NOTE					
SEE NOTE									
Q'TY		Q'TY		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK) CO., LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE IMTECH INC.					
									
ND.		PARTS		MATERIAL		Q'TY		FINISHING	
1		KNOB		NYLON		1		BLACK	
2		COVER		SUS		1		NATURAL	
3		CASE		NYLON		1		BLACK	
4		TERMINAL		BRASS		3		AG PLATED	
5		CONTACT		BRASS		1		AG PLATED	
6		SPRING		SUS		1		NATURAL	
7									
8									