

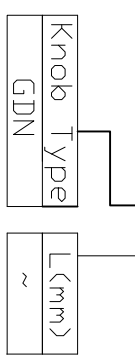


MODEL CODE

SS-12D28-GDN

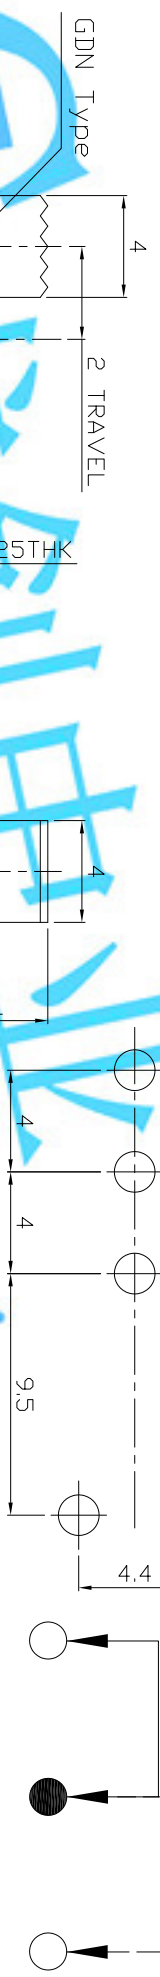

DIMENSIONS

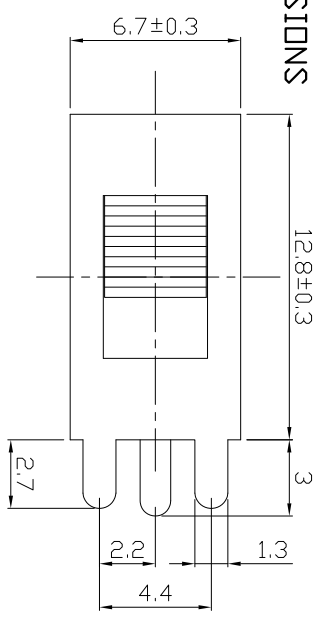


P.C.B LAYOUT

BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

CIRCUIT DIAGRAM

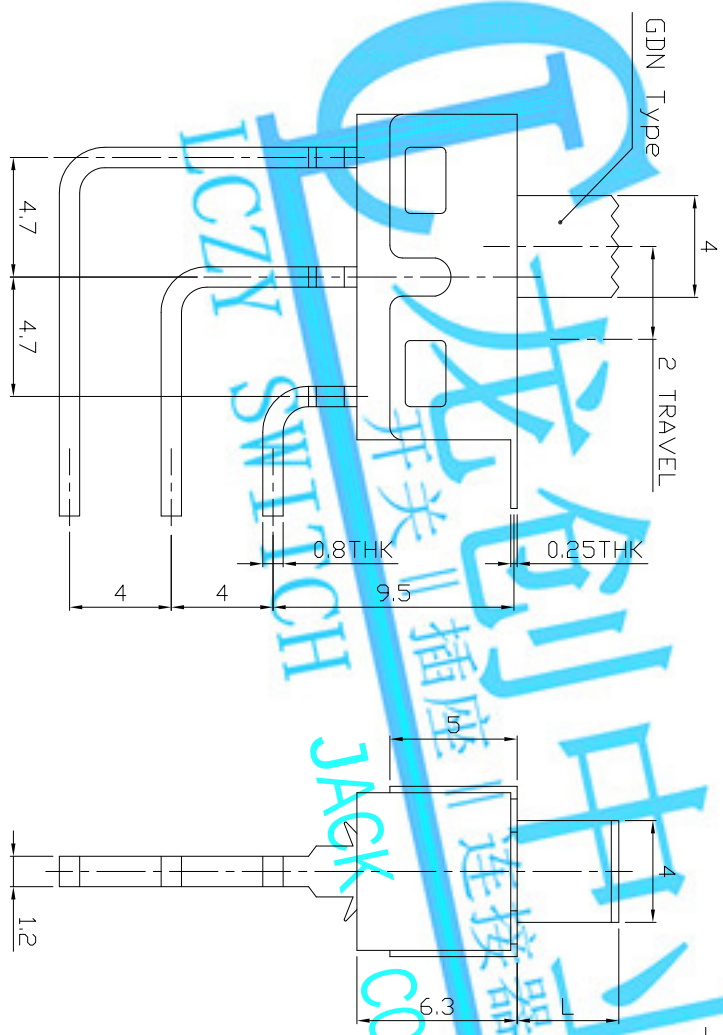

RATING	AC 125V DR 28V DC 3A
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	350±100gf
OPERATING LIFE(cycles)	10,000

8							LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	SUS	1		WITHIN 1.5mm: ±0.1mm	UNITS mm	TITLE: SLIDE SWITCH / VERTICAL PART NO: SS-12D28 DWG NO: ADL-12D28			
6	SPRING PLATE	PBS	1	Ag PLATED	OVER 1.5mm: ±0.2mm	MAT'L				
5	COVER	SUS	1	WASHING		SEE NOTE				
4	CONTACT FOOT	BRASS	3	Ag PLATED		FINISH				
3	BAR	PA66	1	RED		SEE NOTE				
2	KONB	PA66	1	BLACK						
1	CASE	PA9T	1	RED		Q'TY				
ND.	PARTS	MATERIAL		FINISHING			APPD:	1/1	A	CUSTOMER DRAWING