


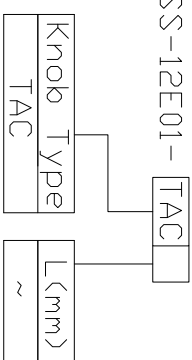
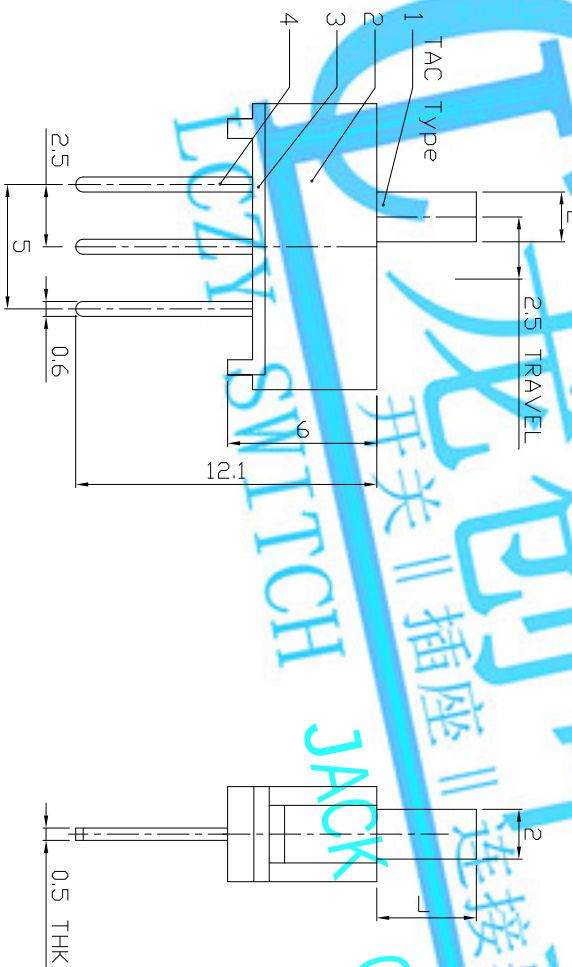


DIMENSIONS

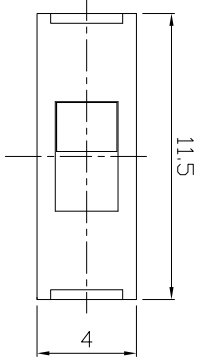

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	SHORTING
TRAVEL	2.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6						SEE NOTE					
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD		FINISH					
4	TERMINAL	BRASS STRIP	3	Ag PLATED		SEE NOTE					
3	BASE	PA+FG	1	BLACK		DR:	2016/08/04	SLIDE SWITCH / VERTICAL		PART NO.:	SS-12E01
2	HOUSING	PA+FG	1	BLACK		CHKD:	2016/08/04	DWG NO.:		AZJ-12E01	
1	KNDB	PA+FG	1	BLACK		Q'TY		SCALE		SHEET	REV.
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:		4/1	1/1	A	CUSTOMER DRAWING