
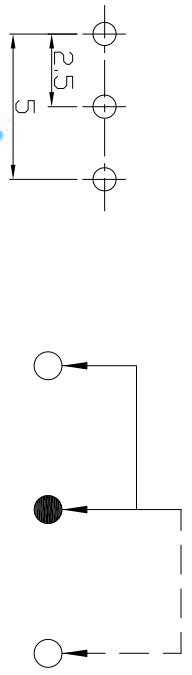
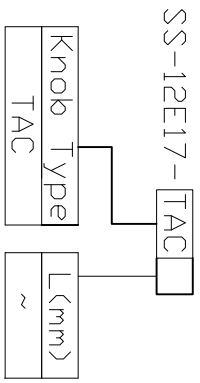



DIMENSIONS

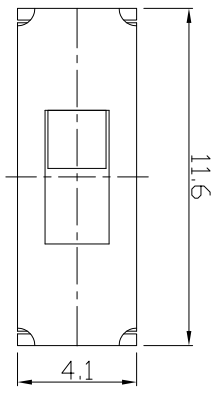

P.C.B LAYOUT

CIRCUIT DIAGRAM

BOTTOM VIEW

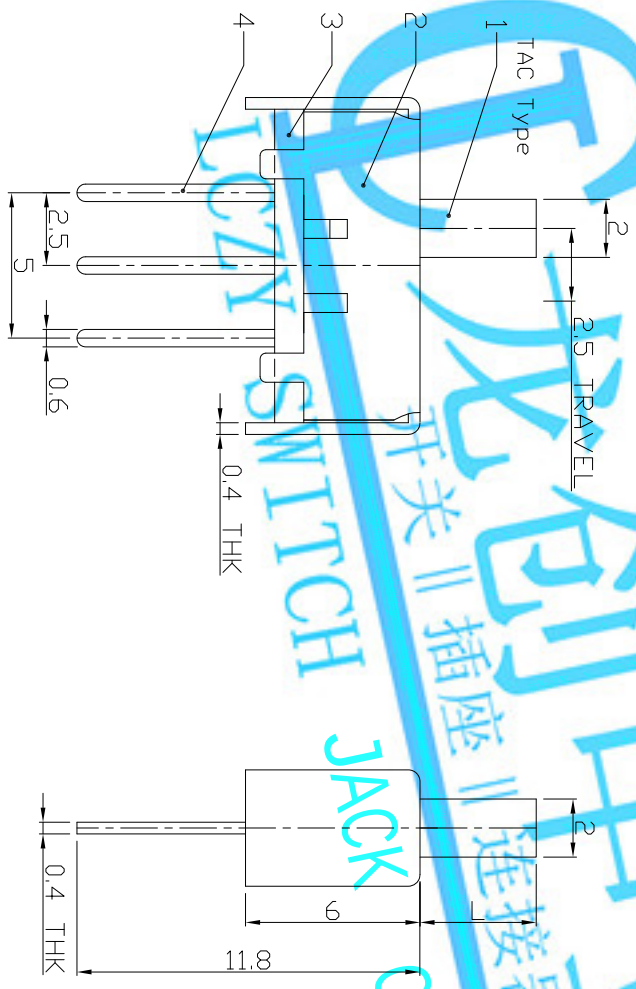

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6						SEE NOTE					
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED							
4	TERMINAL	BRASS STRIP	3	Ag PLATED		FINISH		TITLE:	SLIDE SWITCH / VERTICAL	PART NO.:	SS-12E17
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE		DR:	Rocky 2015/05/21	DWG NO.:	ADL-12E17
2	FRAME	STEEL STRIP	1	BLACK		Q'TY		CHKD:	Rocky 2015/05/21	SCALE	SHEET 4/1
1	KNDB	PDM	1	BLACK				APPD:		REV.	A
ND.	PARTS	MATERIAL	Q'TY	FINISHING						CUSTOMER	DRAWING