


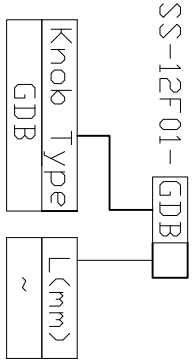
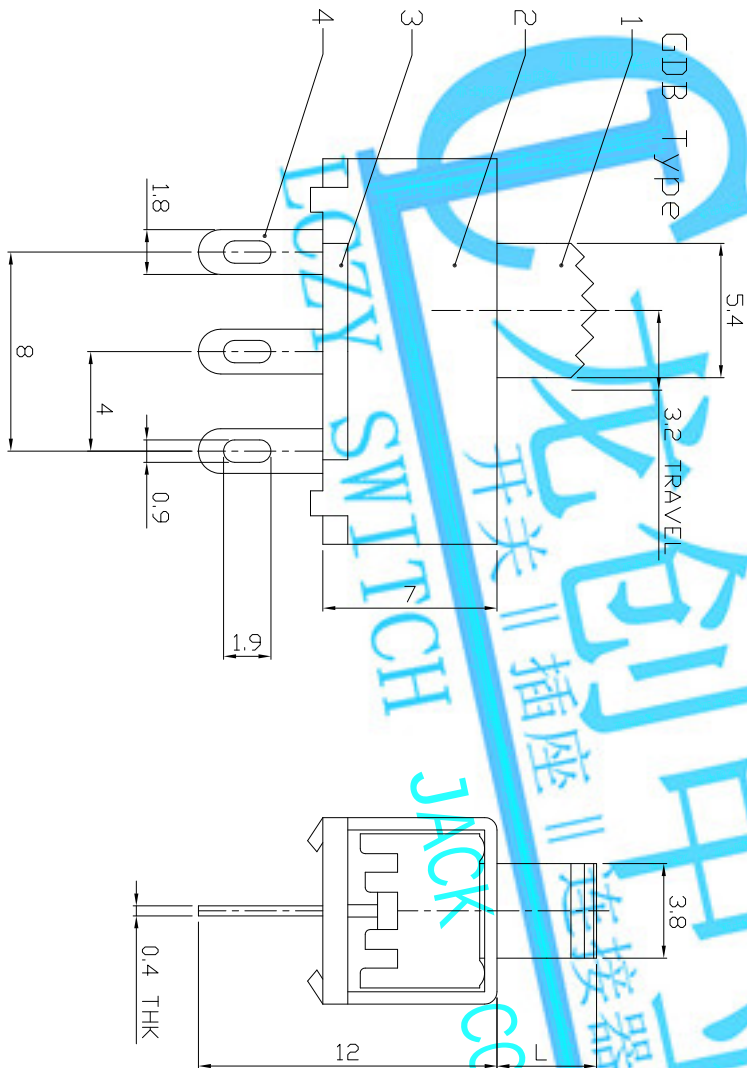


DIMENSIONS

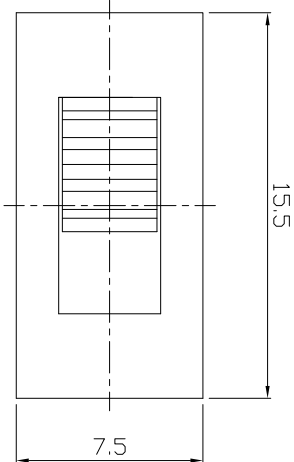

P.C.B. LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	SPRING	STEEL WIRE	1	TEMPER						
5	CONTACT	BRASS STRIP	1	Ag PLATED						
4	TERMINAL	BRASS STRIP	3	Ag PLATED		FINISH	TITLE: SLIDE SWITCH / VERTICAL			
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE				
2	FRAME	STEEL STRIP	1	BLACK						
1	KNDB	PDM	1	BLACK		Q'TY	CHKD: Rocky 2015/07/07	DWG NO: ADL-12F 01	SCALE SHEET 1/1	REV. A
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.					