

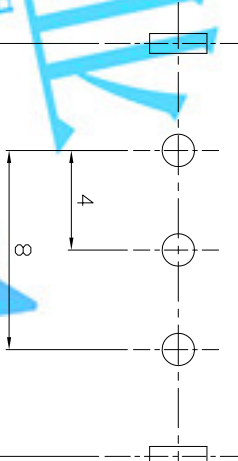
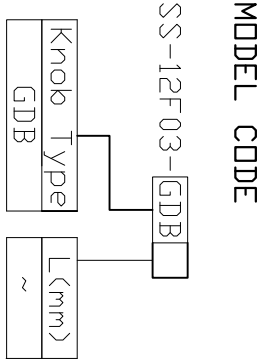
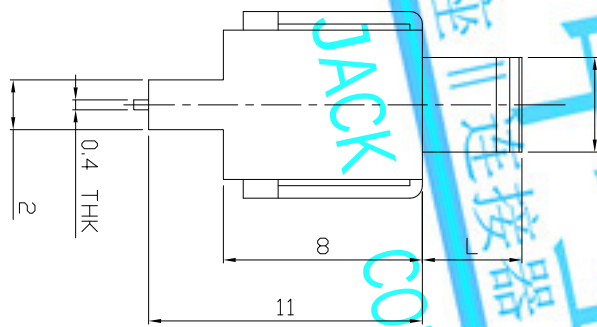
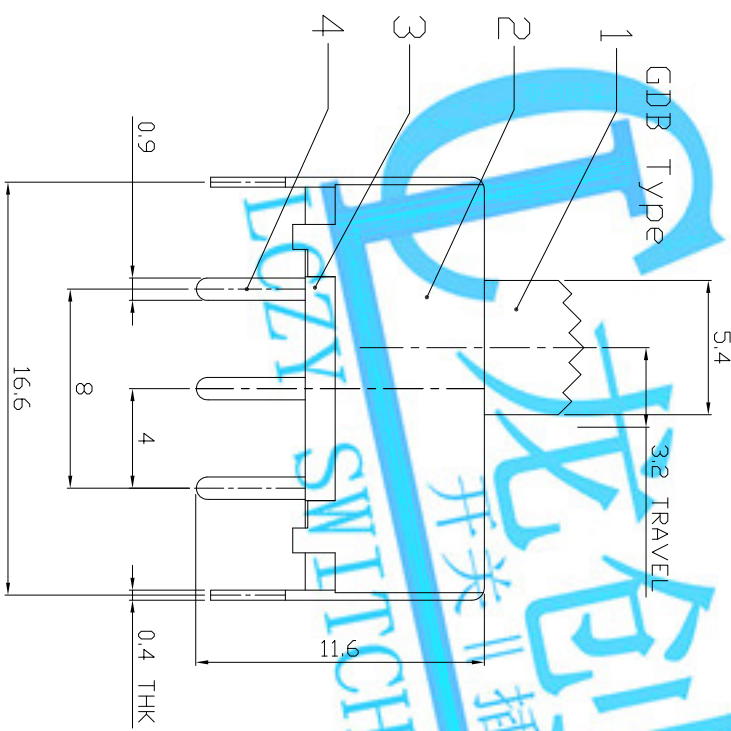


DIMENSIONS

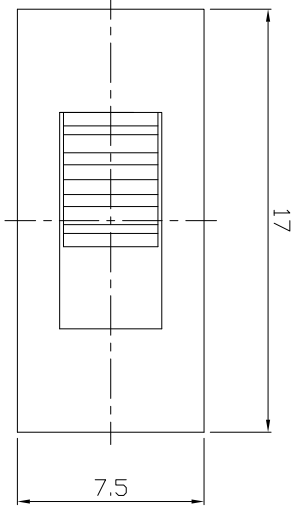

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7						MAT'L						
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE:		PART NO:			
5	CONTACT	BRASS STRIP	1	Ag PLATED			SLIDE SWITCH / VERTICAL		SS-12F03			
4	TERMINAL	BRASS STRIP	3	Ag PLATED								
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH	DR: Jacky 2015/07/07		DWG NO:			
2	FRAME	STEEL STRIP	1	Ni PLATED		SEE NOTE	CHKD: Jacky 2015/07/07		ADL-12F03			
1	KNDB	PDM	1	BLACK		Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER
ND.	PARTS	MATERIAL	Q'TY	FINISHING					2:1	1/1	A	DRAWING