
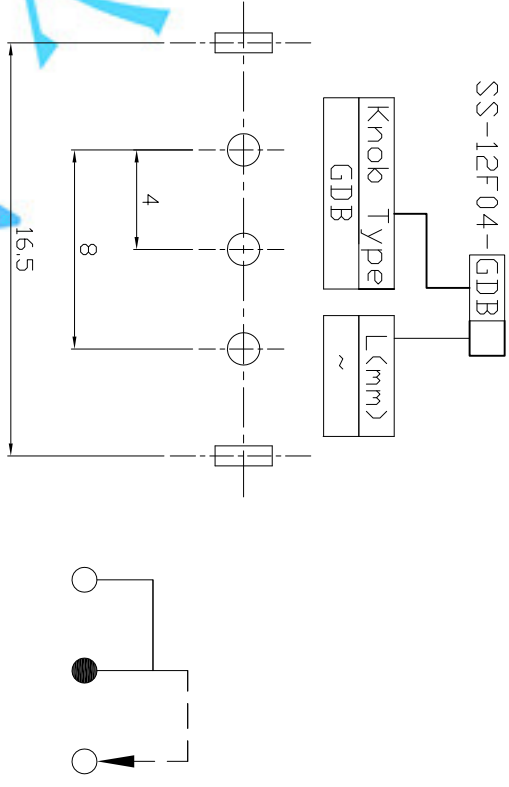
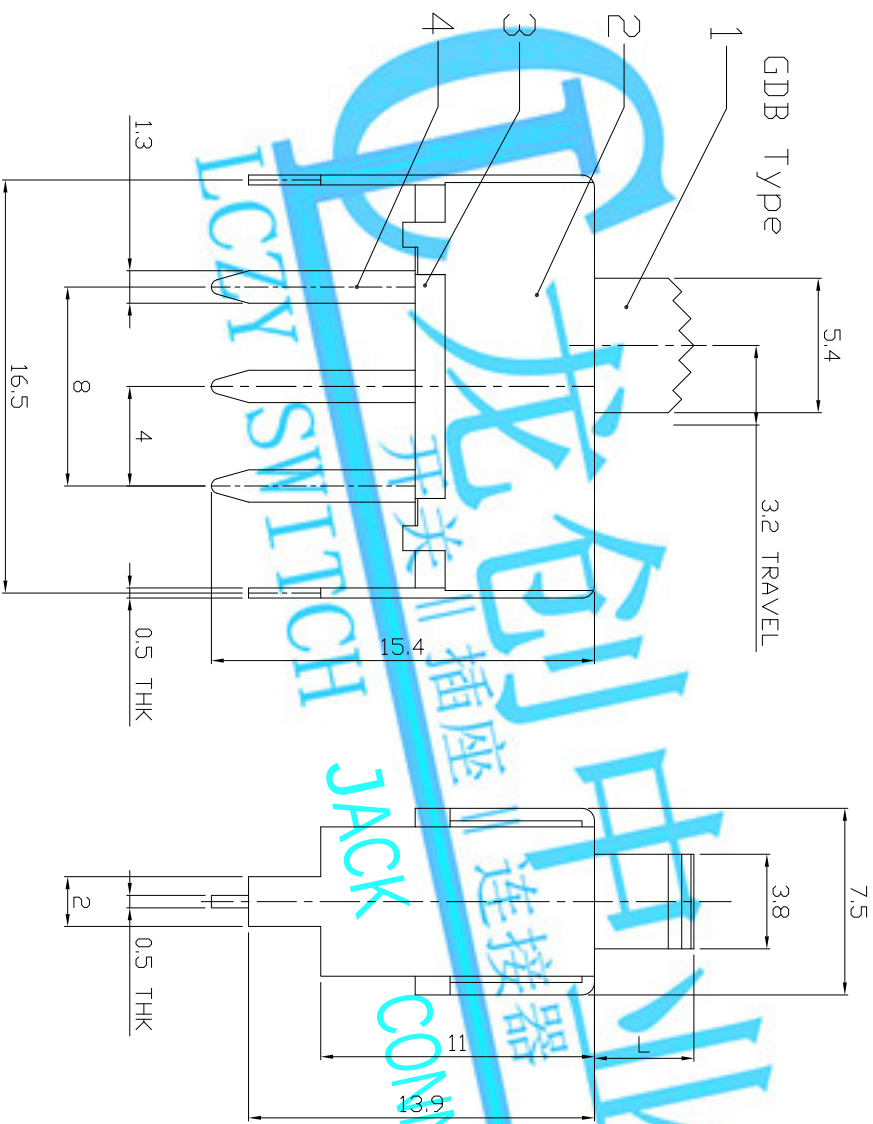


DIMENSIONS

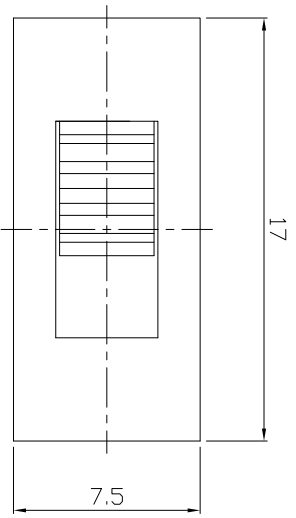

P.C.B LAYOUT
BOTTOM VIEW
ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					MAT'L	SEE NOTE				
6	SPRING	STEEL WIRE	1	NATURAL	SEE NOTE					
5	CONTACT	BRASS STRIP	1	Ag PLATED						
4	TERMINAL	BRASS STRIP	3	Ag PLATED	FINISH		TITLE: SLIDE SWITCH / VERTICAL PART NO.: SS-12F 04			
3	BASE	PHENOLIC RESIN	1	NATURAL	SEE NOTE					
2	FRAME	STEEL STRIP	1	NI PLATED	DR: Ricky 2015/07/07	DWG NO: ADL-12F 04				
1	KNDB	PDM	1	BLACK	CHKD: Ricky 2015/07/07	SCALE SHEET REV. 1/1				
ND.	PARTS	MATERIAL	Q'TY	FINISHING	APPD:		CUSTOMER DRAWING			