




DIMENSIONS

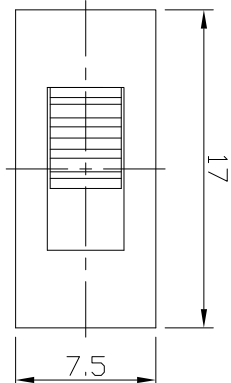


GDB Type

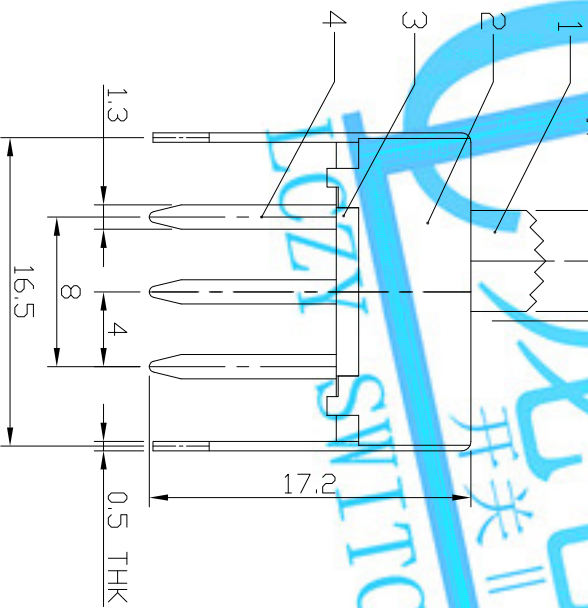


P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM



SS-12F08-GDB



MODEL CODE

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	200±80gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED TITLE: SLIDE SWITCH / VERTICAL PART NO.: SS-12F 08 DWG NO.: ADL-12F 08 SCALE: 1/1 REV.: CUSTOMER DRAWING			
7	SPRING	STEEL WIRE	1	NATURAL	MAT'L	SEE NOTE				
6	CONTACT	BRASS STRIP	1	Ag PLATED	FINISH	SEE NOTE				
5	TERMINAL	BRASS STRIP	3	Ag PLATED	SEE NOTE	DR: Jieky 2015/05/22				
4	BASE	PHENOLIC RESIN	1	BLACK	Q'TY	CHKD: Jieky 2015/05/22				
3	FRAME	STEEL STRIP	1	NI PLATED	Q'TY	APPD:				
2	KNDB	PDM	1	BLACK	Q'TY	APPD:				
1	PARTS	MATERIAL	Q'TY	FINISHING	Q'TY	APPD:				