




RoHS
Compliant
2002/95/EC

MODEL CODE

SS-12F21-GBG

Knob Type
GBG
VAA

L(mm)
~



P.C.B LAYOUT
BOTTOM VIEW





CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

DIMENSIONS

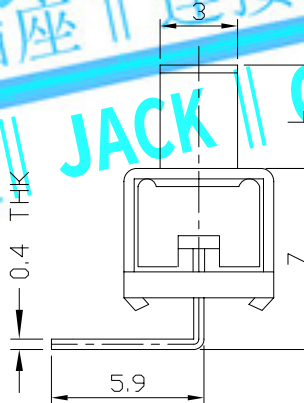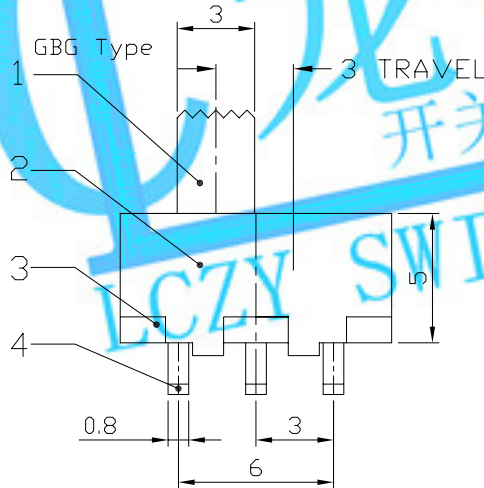

8					WITHIN 1.5mm: ±0.1mm		UNITS mm		LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
7					OVER 1.5mm: ±0.2mm		MAT'L								
6	CONTACT	BRASS STRIP	1	Ag PLATED			SEE NOTE		TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12F21				
5	SPRING	STEEL WIRE	1	NATURAL					DR: <i>Ricky</i> 2015/05/22		DWG NO.: ADL-12F21				
4	TERMINAL	BRASS STRIP	3	Ag PLATED			FINISH								
3	BASE	PHENOLIC RESIN	1	NATURAL			SEE NOTE		CHKD: <i>Ricky</i> 2015/05/22						
2	FRAME	STEEL STRIP	1	BLACK			Q'TY								
1	KNOB	POM	1	BLACK											
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				APPD:		SCALE 3:1		SHEET 1/1	REV. A	CUSTOMER DRAWING
1		2		3		4		5		6		7			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.