

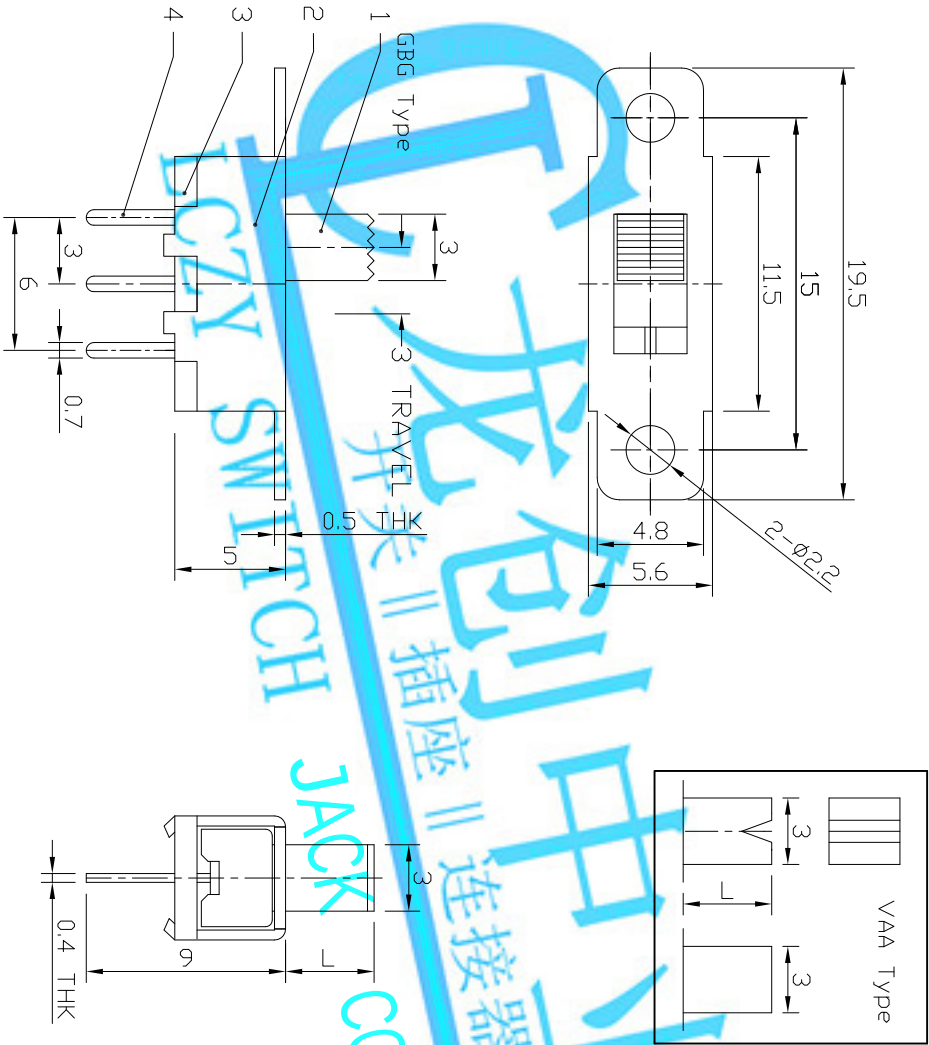


DIMENSIONS

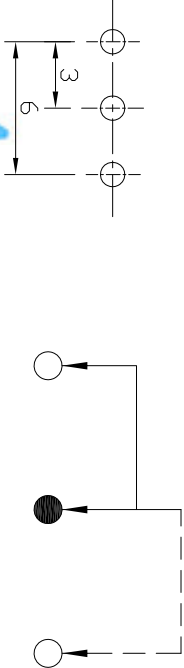

MODEL CODE

SS-12F 30-GBG

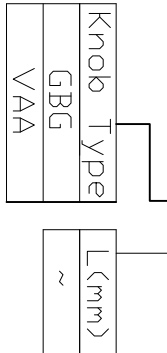

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING	STEEL WIRE	1	NATURAL	SEE NOTE					
5	CONTACT	BRASS STRIP	1	Ag PLATED						
4	TERMINAL	BRASS STRIP	3	Ag PLATED	FINISH		TITLE:	SLIDE SWITCH / VERTICAL	PART NO.:	SS-12F 30
3	BASE	PHENOLIC RESIN	1	NATURAL	SEE NOTE		DR:	Rocky 2015/05/22	DWG NO.:	ADL-12F 30
2	FRAME	STEEL STRIP	1	BLACK			CHKD:	Rocky 2015/05/22	SCALE	SHEET 1/1
1	KNDB	PDM	1	BLACK			Q'TY		REV.	A
ND.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:		CUSTOMER	DRAWING