





DIMENSIONS





MODEL CODE

SS-12F33-GBG

Knob Type
GBG
VAA



L (mm)	$\frac{1}{L}$ (mm ⁻¹)	$\ln \frac{1}{L}$	$\ln \frac{1}{L} \times 10^3$
10	0.10	-2.303	-2.303
20	0.05	-2.996	-2.996
30	0.033	-3.401	-3.401
40	0.025	-3.689	-3.689
50	0.020	-3.912	-3.912
60	0.017	-4.077	-4.077
70	0.014	-4.268	-4.268
80	0.013	-4.444	-4.444
90	0.011	-4.605	-4.605
100	0.010	-4.787	-4.787

 $\sim$ 

P.C.B LAYOUT

BOTTOM VIEW


CIRCUIT DIAGRAM

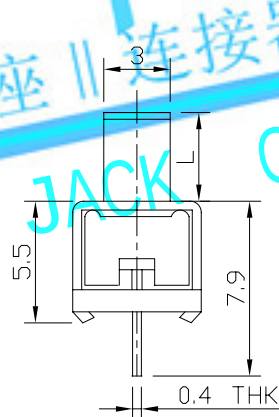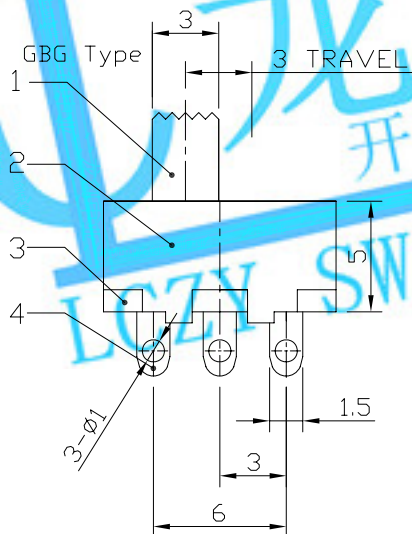

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NO SHORTING
TRAVEL	3mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
7					OVER 1.5mm: ±0.2mm	MAT'L							
6	CONTACT	BRASS STRIP	1	Ag PLATED		SEE NOTE	TITLE:	PART NO.:					
5	SPRING	STEEL WIRE	1	NATURAL			SLIDE SWITCH / VERTICAL	SS-12F33					
4	TERMINAL	BRASS STRIP	3	Ag PLATED		FINISH	DR:	2015/05/22		DWG NO.:			
3	BASE	PHENOLIC RESIN	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	CHKD:	2015/05/22		ADL-12F33			
2	FRAME	STEEL STRIP	1	BLACK		Q'TY				SCALE	SHEET	REV.	CUSTOMER DRAWING
1	KNOB	POM	1	BLACK						3:1	1/1	A	
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:			3:1	1/1	A	