





RoHS
Compliant
2002/95/EC

MODEL CODE



SS-12F39-GBG

REV.	ECN.	NO.	APPD.

DIMENSIONS


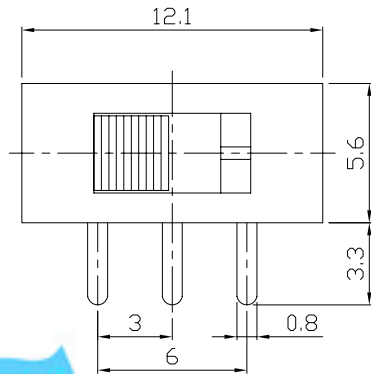


Knob Type	L(mm)
GBG	~
VAA	~

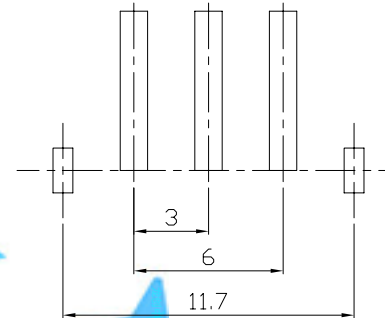

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

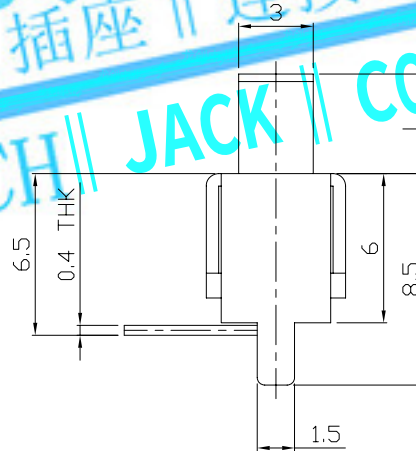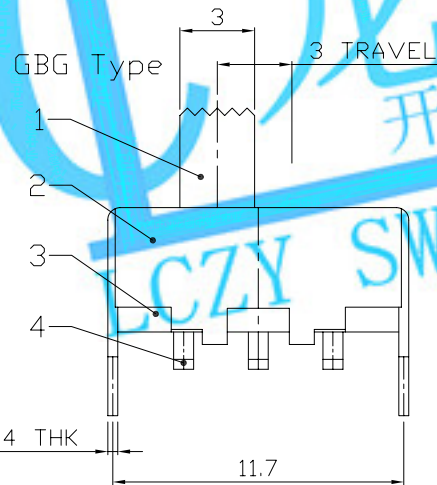

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
7					OVER 1.5mm: ±0.2mm	MAT'L							
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12F39				
5	CONTACT	BRASS STRIP	1	Ag PLATED									
4	TERMINAL	BRASS STRIP	3	Ag PLATED			FINISH		DR: <i>Ricky</i> 2015/07/09				
3	BASE	PHENOLIC RESIN	1	NATURAL			SEE NOTE						
2	FRAME	STEEL STRIP	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY		CHKD: <i>Ricky</i> 2015/07/09		DWG NO.: ADL-12F39		
1	KNOB	POM	1	BLACK							SCALE	SHEET	REV.
NO.	PARTS	MATERIAL	Q'TY	FINISHING					APPD:		3:1	1/1	A