





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

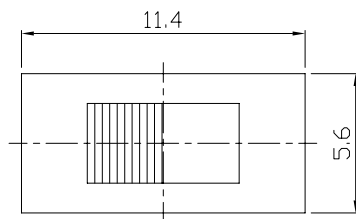


MODEL CODE


SS-12F56-GBY

Knob Type
GBY
VAK



L(mm)
~



P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

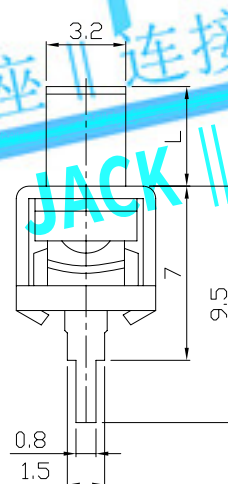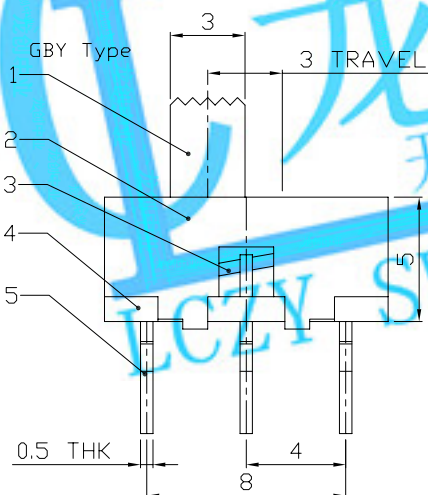

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8				
7				
6	SPRING	STEEL WIRE	1	NATURAL
5	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED
4	BASE	PHENDLIC RESIN	1	YELLOW
3	CONTACT	BRASS STRIP	1	Ag PLATED OVER Ni PLATED
2	FRAME	STEEL STRIP	1	BLACK
1	KNOB	POM	1	BLACK
NO.	PARTS	MATERIAL	Q'TY	FINISHING

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE:
SLIDE SWITCH / VERTICAL

PART NO.:
SS-12F56

DR: Ricky 2015/06/09

DWG NO.:
ADJ-12F56

CHKD: Ricky 2015/06/09

APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
4:1	1/1	A	