





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS


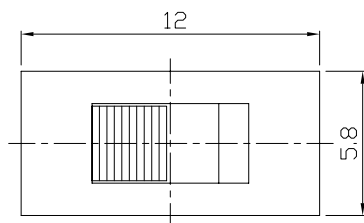


MODEL CODE

SS-12F65-GBG

Knob Type
GBG
VAA

L(mm)
~





PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

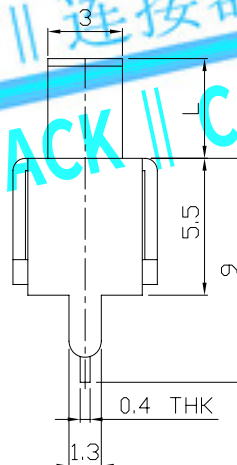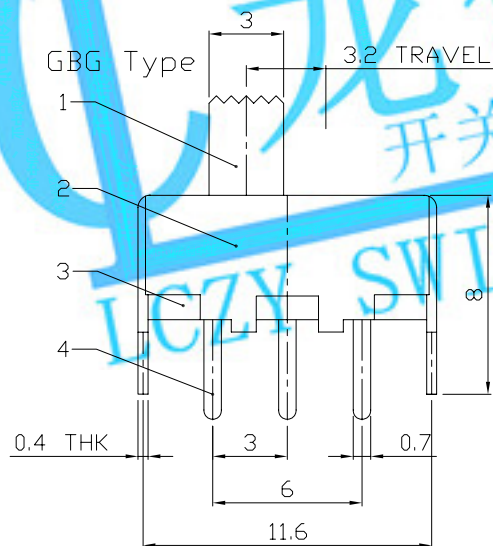

8					WITHIN 1.5mm: ±0.1mm
7					OVER 1.5mm: ±0.2mm
6	SPRING	STEEL WIRE	1	NATURAL	
5	CONTACT	BRASS STRIP	1	Ag PLATED	
4	TERMINAL	BRASS STRIP	3	Ag PLATED	
3	CASE	PHENOLIC RESIN	1	NATURAL	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12F65	
Q'TY		DR: Ricky 2015/07/13		DWG NO.: ADL-12F65	
		CHKD: Ricky 2015/07/13			
		APPD:		SCALE	SHEET
				4:1	1/1
				REV.	CUSTOMER
				A	DRAWING