

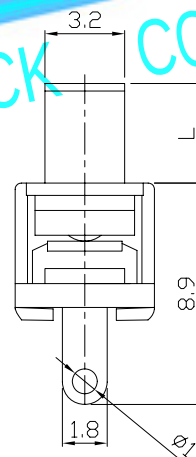
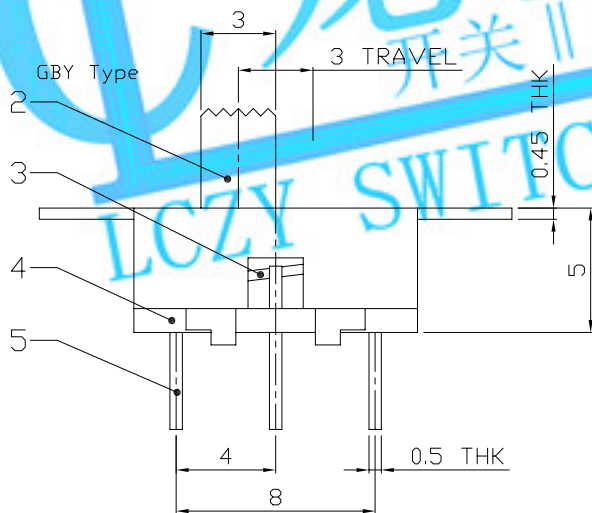




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

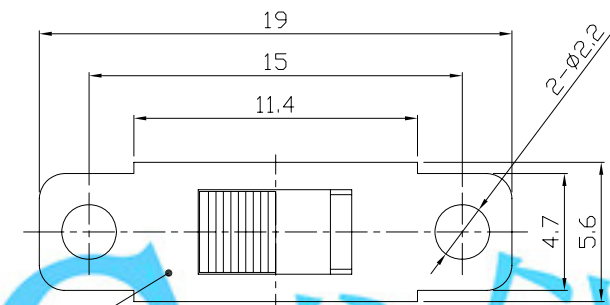


MODEL CODE


SS-12F71-GBY

Knob Type
GBY
VAK

L(mm)
~



PCB LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7	SPRING	STEEL WIRE	1	NATURAL
6	STEEL BALL	STEEL	1	NATURAL
5	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED
4	BASE	PHENDLIC RESIN	1	NATURAL
3	CONTACT	BRASS STRIP	1	Ag PLATED
2	KNOB	POM	1	BLACK
1	FRAME	STEEL STRIP	1	BLACK

WITHIN 1.5mm: ±0.1mm	UNITS mm
OVER 1.5mm: ±0.2mm	MAT'L
	SEE NOTE
	FINISH
	SEE NOTE
	Q'TY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
TITLE: SLIDE SWITCH / VERTICAL				PART NO.: SS-12F71			
DR: Ricky 2015/06/09				DWG NO.: ADJ-12F71			
CHKD: Ricky 2015/06/09							
APPD:				SCALE	SHEET	REV.	CUSTOMER DRAWING
				3:1	1/1	A	