





RoHS
Compliant
2002/95/EC

MODEL CODE


SS-12F147-01-GBG

DIMENSIONS

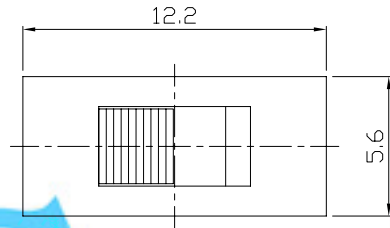


Knob Type
GBG
VAA



L(mm)
~



P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

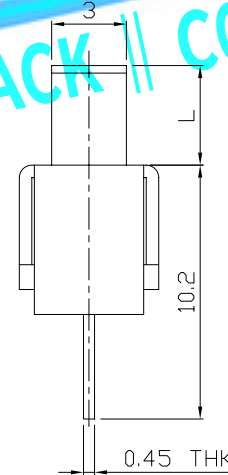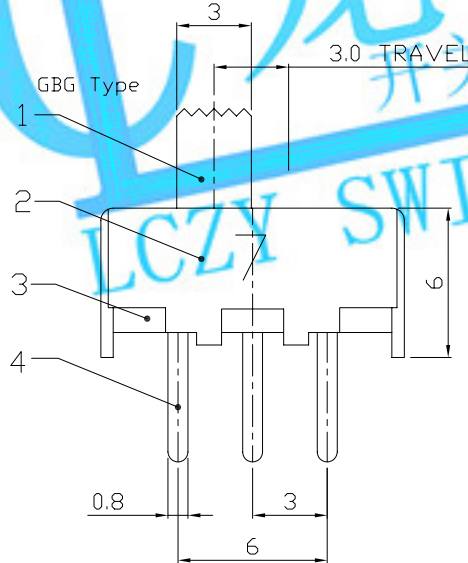

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.0mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L		TITLE: SLIDE SWITCH / VERTICAL			
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE		PART NO.: SS-12F147-01			
5	CONTACT CLIP	BRASS STRIP	1	Ag PLATED				DR: Ricky 2015/06/09		DWG NO.: ADJ-12F147-01	
4	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED				CHKD: Ricky 2015/06/09			
3	BASE	PHENOLIC RESIN	1	NATURAL				APPD:		SCALE	SHEET
2	FRAME	STEEL STRIP	1	Ni PLATED						3:1	1/1
1	KNOB	POM	1	BLACK						REV.	CUSTOMER
NO.	PARTS	MATERIAL	Q'TY	FINISHING						A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

