
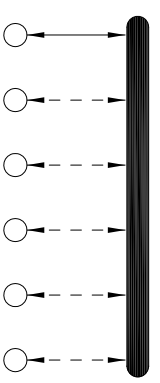
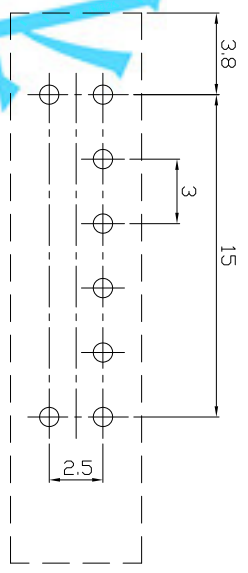
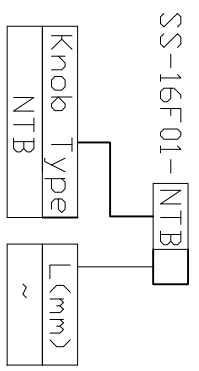
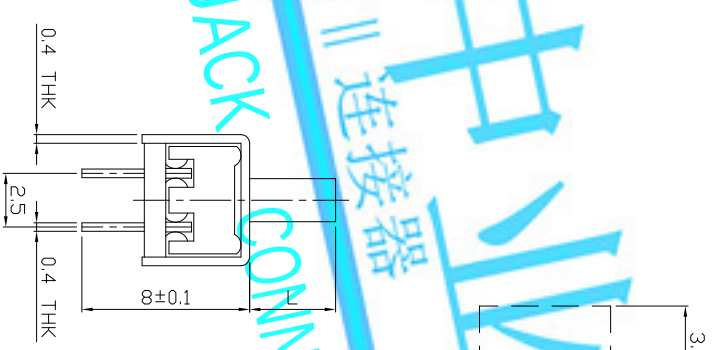


DIMENSIONS

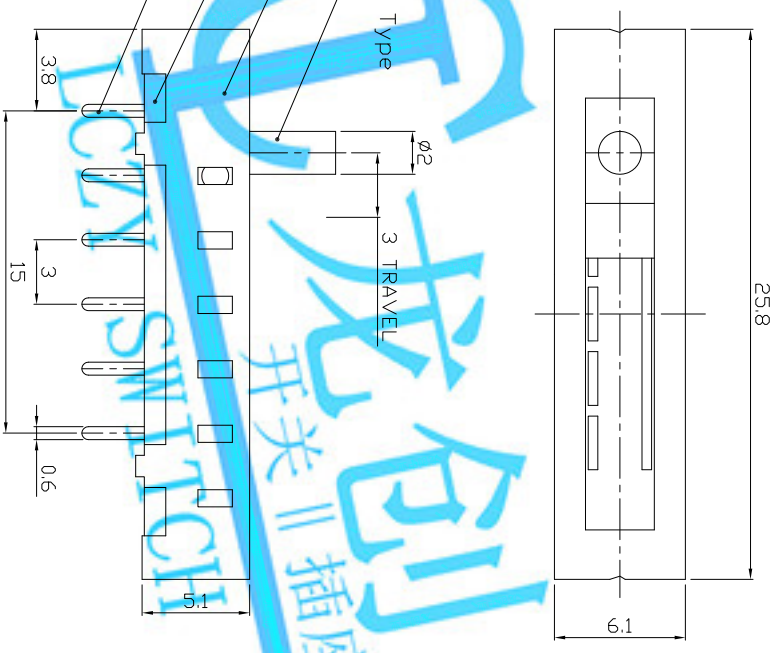

MODEL CODE

SS-16F01-NTB

P.C.B LAYOUT

BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P6T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	3mm
OPERATING FORCE	280±80gf
OPERATING LIFE(cycles)	10,000

8	CONTACT	BRASS STRIP	1	AG PLATED	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	2	NATURAL	SEE NOTE	MAT'L				
6	STEEL BALL	STEEL	1	NATURAL	SEE NOTE	FINISH				
5	TERMINAL	BRASS STRIP	8	AG PLATED	SEE NOTE	DR:				
4	BASE	PHENOLIC RESIN	1	NATURAL	SEE NOTE	CHKD:	SLIDE SWITCH / VERTICAL	PART NO.:	SS-16F 01	DWG NO.:
3	FRAME	STEEL STRIP	1	NI PLATED	SEE NOTE	APPD:	2016/02/17	ADL-16F 01	SCALE	REV.
2	KNDB	POM	1	BLACK	SEE NOTE	2016/02/17	1/1	A	CUSTOMER	DRAWING
1	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.	5/2	1/1	A	CUSTOMER	DRAWING