
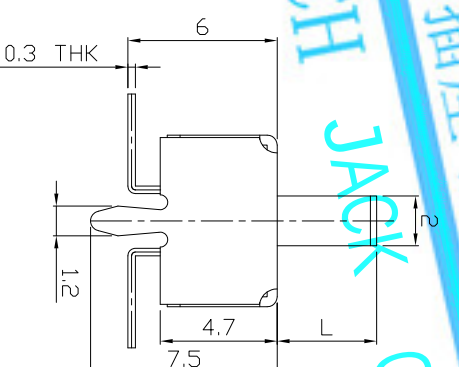
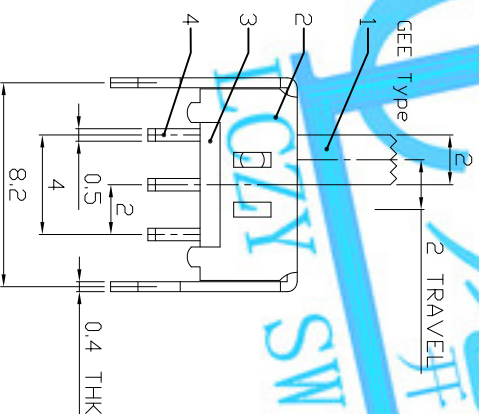

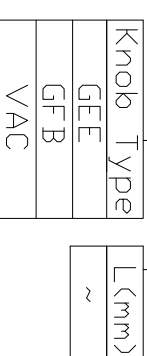
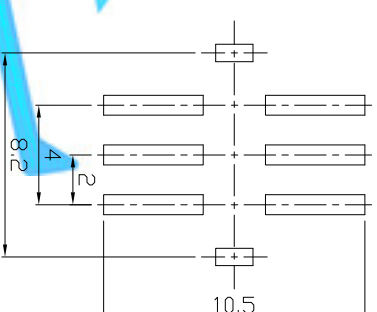






RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250 $\pm$ 100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
UNITS		mm		TITLE: SLIDE SWITCH / VERTICAL PART NO: SS-22D10 DWG NO: ADL-22D10					
MAT'L									
WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm		SEE NOTE		DR: Rocky 2015/09/01 CHKD: Rocky 2015/09/01 APPD: SCALE SHEET REV. 4:1 1/1 A CUSTOMER DRAWING					
FINISH		SEE NOTE		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INVENTECH INC.					
Q'TY		Q'TY		Q'TY					
MATERIAL		FINISHING		Q'TY					
1 KNOB		PDM		Q'TY					
2 FRAME		STEEL STRIP		Q'TY					
3 BASE		PHENUOLIC RESIN		Q'TY					
4 TERMINAL		BRASS STRIP		Q'TY					
5 CONTACT CLIP		PBS STRIP		Q'TY					
6 SPRING PLATE		SUS		Q'TY					
7				Q'TY					
8				Q'TY					