
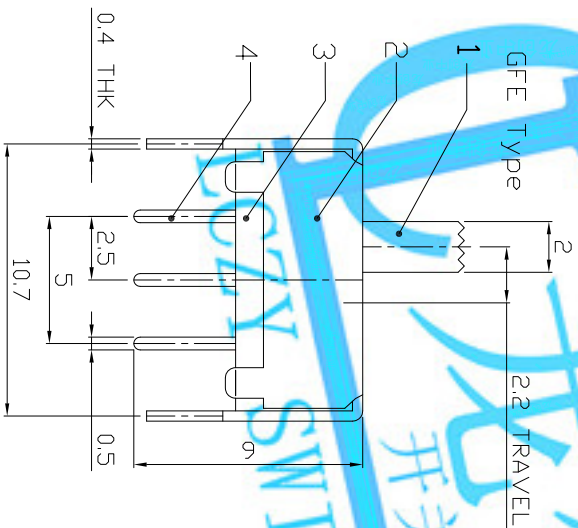


MODEL CODE

SS-22E01-GFE



P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7					OVER 1.5mm: ±0.2mm						
6	SPRING	STEEL WIRE	2	NATURAL		SEE NOTE	TITLE:	PART NO.:			
5	CONTACT	BRASS STRIP	2	AG PLATED			SLIDE SWITCH / VERTICAL	SS-22E01			
4	TERMINAL	BRASS STRIP	6	AG PLATED		FINISH	DR: Rocky 2015/09/01	DWG NO.:	ADL-22E01		
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	CHKD: Rocky 2015/09/01	SCALE	SHEET	REV.	CUSTOMER DRAWING
2	FRAME	STEEL STRIP	1	NI PLATED		Q'TY	APPD:	3:1	1/1	A	
1	KNOB	POM	1	BLACK							
NO.	PARTS	MATERIAL	Q'TY	FINISHING							