

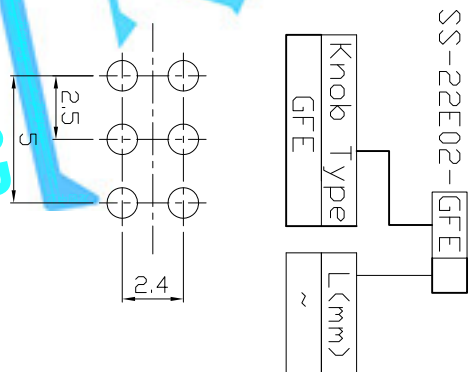
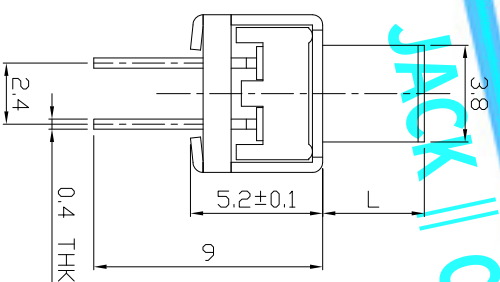


DIMENSIONS

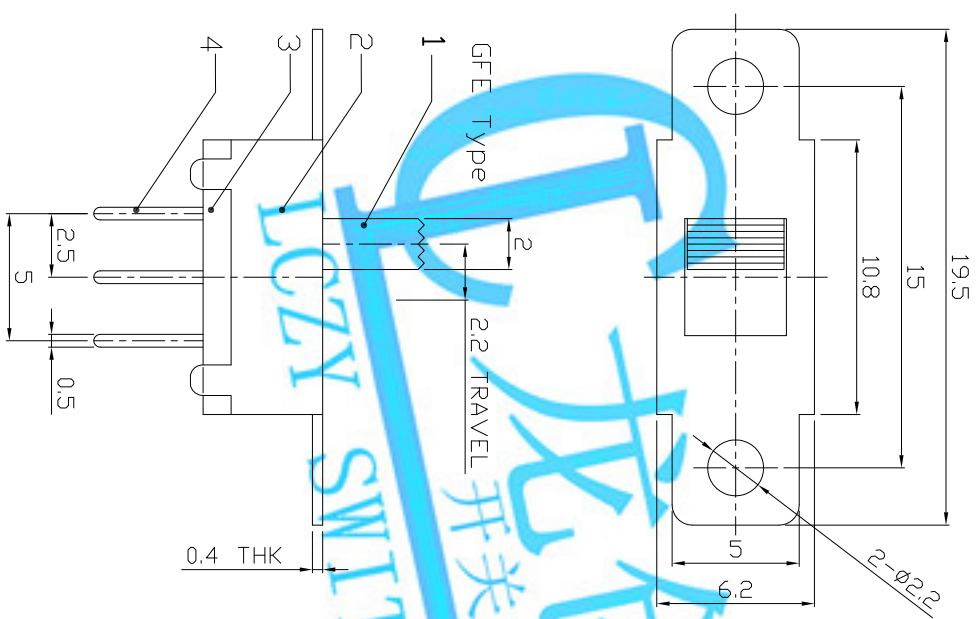

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7						MAT'L					
6	SPRING	STEEL WIRE	2	NATURAL		SEE NOTE		TITLE:		PART NO:	
5	CONTACT	BRASS STRIP	2	Ag PLATED				SLIDE SWITCH / VERTICAL		SS-22E02	
4	TERMINAL	BRASS STRIP	6	Ag PLATED		FINISH					
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE		DR:	Rocky 2015/09/01	DWG NO:	
2	FRAME	STEEL STRIP	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDUSTECH INC.	Q'TY		CHKD:	Rocky 2015/09/01	ADL-22E02	
1	KNDB	POM	1	BLACK			APPD:		SCALE	SHEET	REV.
ND.	PARTS	MATERIAL	Q'TY	FINISHING				3:1	1/1	A	CUSTOMER DRAWING