
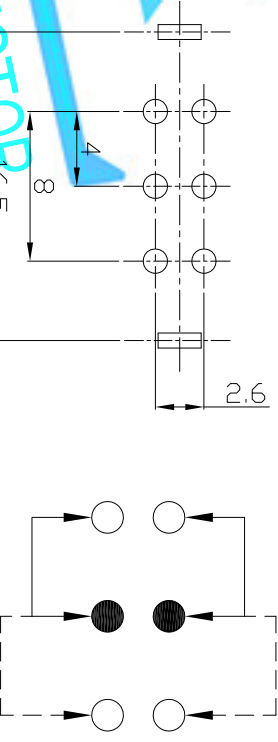
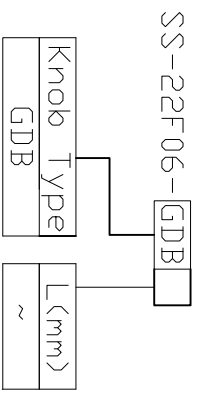
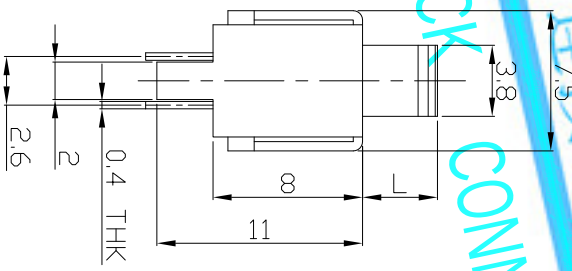
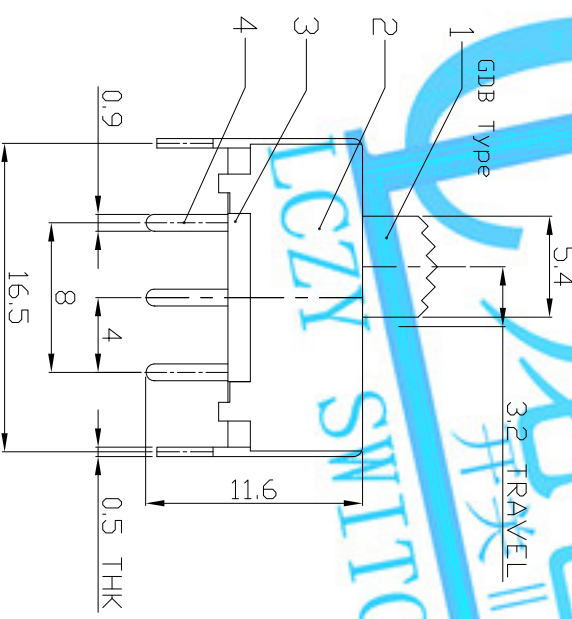


DIMENSIONS

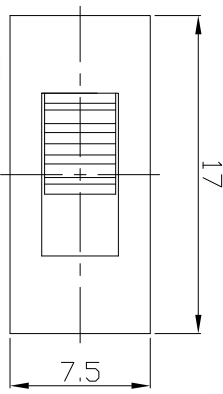

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NO SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING	STEEL WIRE	2	NATURAL	SEE NOTE					
5	CONTACT	BRASS STRIP	2	Ag PLATED	FINISH					
4	TERMINAL	BRASS STRIP	6	Ag PLATED	SEE NOTE					
3	BASE	PHENOLIC RESIN	1	NATURAL	DR:	Rocky 2015/05/26	DWG NO.:	ADL-22F06	SCALE	SHEET
2	FRAME	STEEL STRIP	1	Ni PLATED	CHKD:	Rocky 2015/05/26	REV.	A	CUSTOMER	DRAWING
1	KNDB	PDM	1	BLACK	Q'TY					
ND	PARTS	MATERIAL	Q'TY	FINISHING	APPD:					