
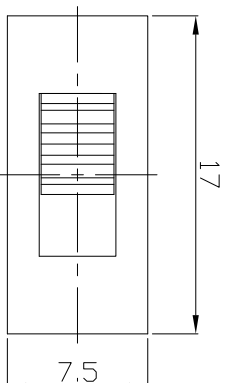


Knob Type	$L(mm)$
GDB	$\sim$

www

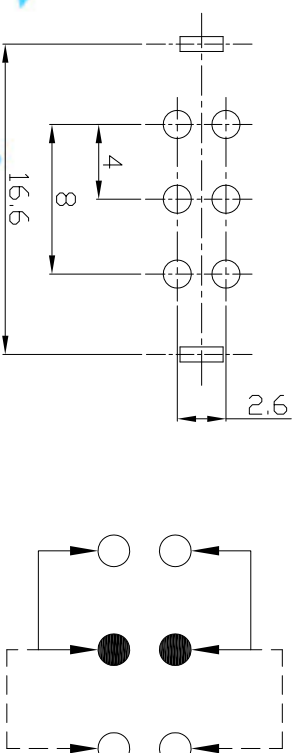


P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180 $\pm$ 80gf
OPERATING LIFE(cycles)	10,000

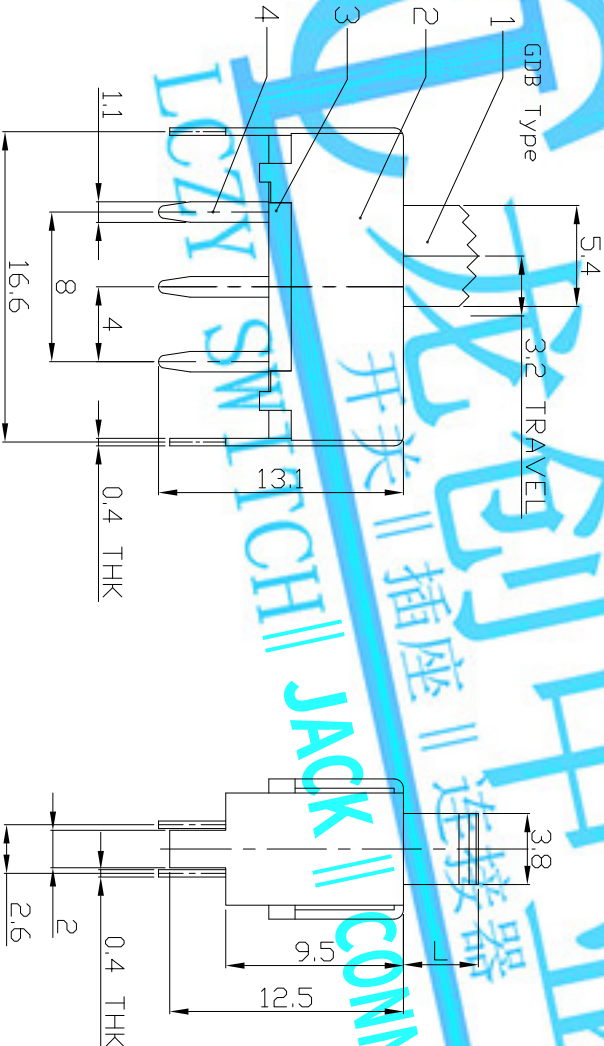

DIMENSIONS

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE: SLIDE SWITCH / VERTICAL				PART NO.: SS-22F10					
				DWG NO.: ADL-22F10					
DR: <i>Rocky</i> 2015/05/27		CHKD: <i>Rocky</i> 2015/05/27							
APPD:		SCALE		SHEET		REV.		CUSTOMER DRAWING	
		2:1		1/1		A			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INVENTECH INC.									
WITHIN 1.5mm: ±0.1mm				UNITS		mm			
OVER 1.5mm: ±0.2mm				MAT'L					
				SEE NOTE					
				FINISH					
				SEE NOTE					
				Q'TY					
									
				APPD:					
				SCALE		SHEET		REV.	
				2:1		1/1		A	
				CUSTOMER DRAWING					
				Q'TY					
				FINISH					
				SEE NOTE					
				MAT'L					
				OVER 1.5mm: ±0.2mm					
				NATURAL					
				AG PLATED					
				AG PLATED					
				NATURAL					
				NI PLATED					
				BLACK					
				Q'TY					
				FINISHING					
				Q'TY					
				MATERIAL					
				PDM					
				STEEL STRIP					
				FRAME					
				KNOB					
				PARTS					
				NO.					