

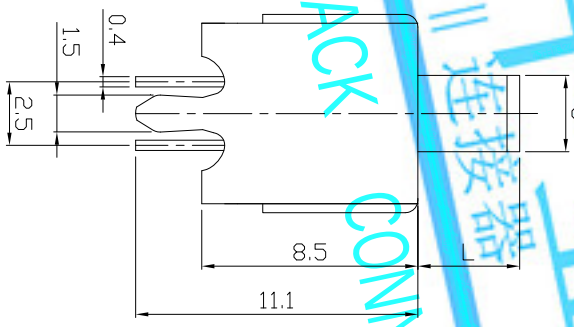
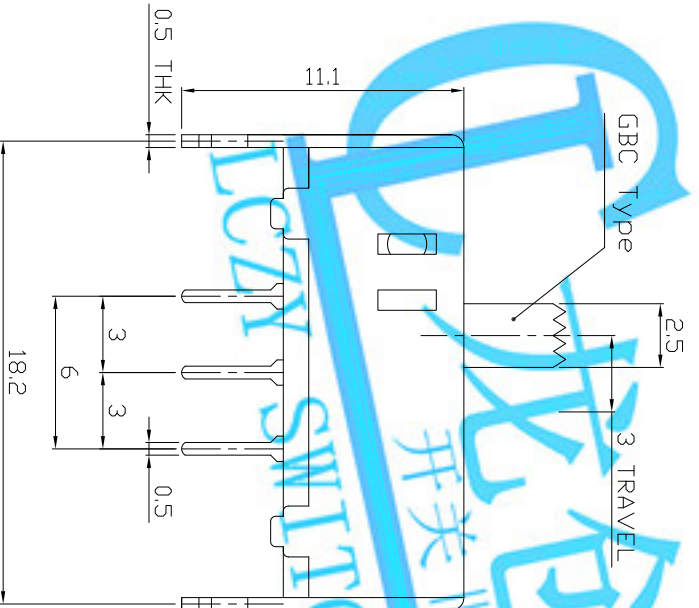
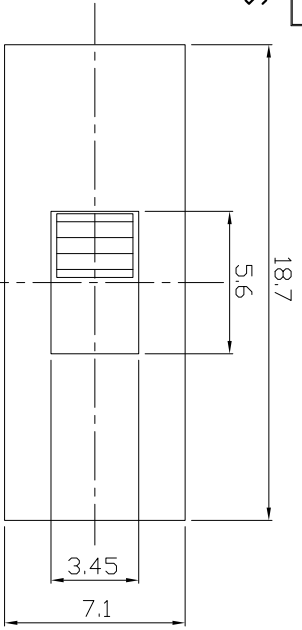



DIMENSIONS

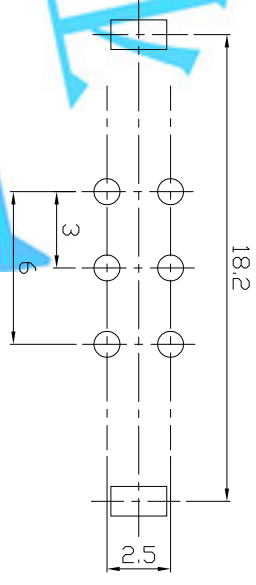

MODEL CODE

SS-22F11- GBC



P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	3mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

NO.	DESCRIPTION	UNIT	VALUE	REMARKS
1	STEEL BALL	STEEL	1	NATURAL
2	SPRING	STEEL WIRE	1	NATURAL
3	CONTACT CLIP	PBS C5210R-EH	2	AG CLAD
4	TERMINAL	BRASS STRIP	6	AG PLATED
5	BASE	PHENOLIC RESIN	1	NATURAL
6	FRAME	STEEL STRIP	1	NI PLATED
7	KNDB	PDM	1	BLACK
8	PARTS	MATERIAL	Q'TY	FINISHING

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

DR: *Rocky* 2016/02/17

CHKD: *Rocky* 2016/02/17

APPD:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

PART NO.: SS-22F11

DWG NO.: ADL-22F11

SCALE SHEET 3/1

REV. 1/1

CUSTOMER DRAWING