


MODEL CODE

SS-22F13-GBG

DIMENSIONS

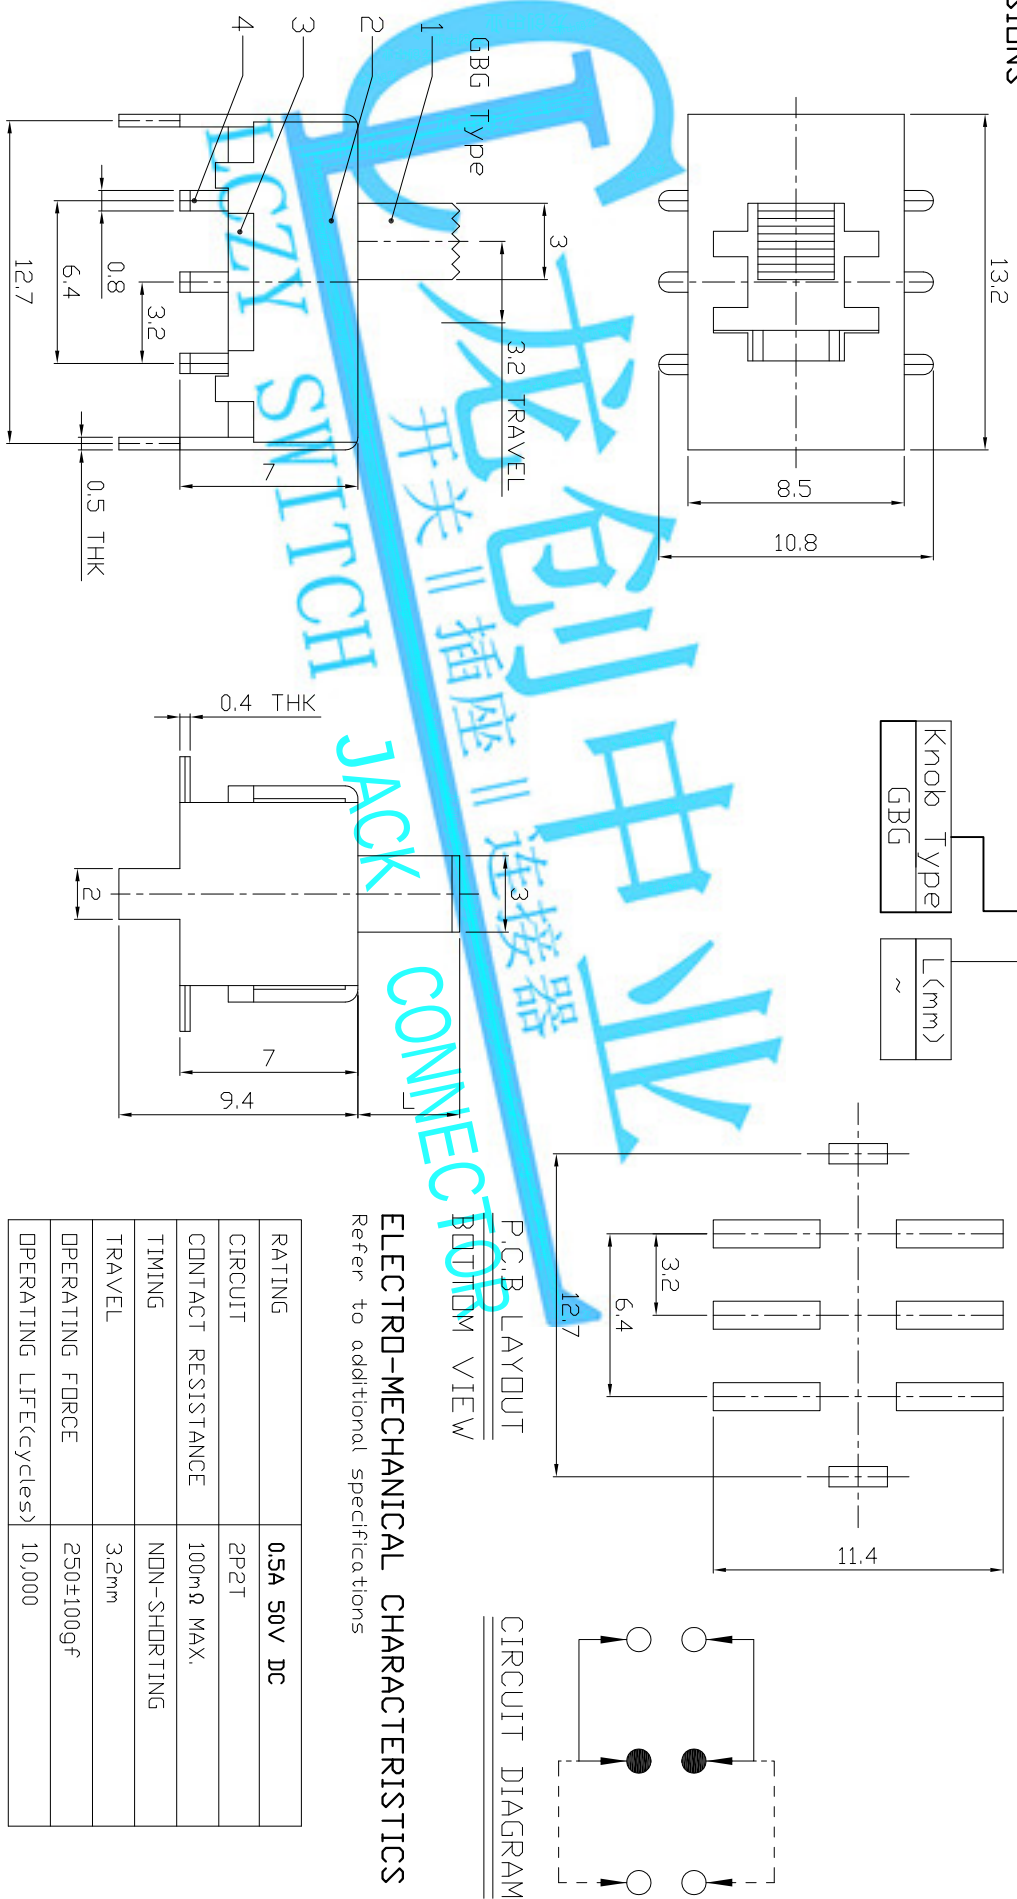

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	CONTACT	BRASS	2	Ag PLATED			SEE NOTE				
5	SPRING	STEEL WIRE	2	NATURAL							
4	TERMINAL	BRASS STRIP	6	Ag PLATED			FINISH	TITLE: SLIDE SWITCH / VERTICAL PART NO.: SS-22F13			
3	BASE	PHENOLIC RESIN	1	NATURAL			SEE NOTE				
2	FRAME	STEEL STRIP	1	NI PLATED			DR: Ricky 2015/09/01				
1	KNDB	PDM	1	BLACK			CHKD: Ricky 2015/09/01				
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:	DWG NO.: ADL-22F13	SCALE	SHEET	REV.
1								3/1	1/1	A	CUSTOMER DRAWING