


```


graph LR
    SS22F48GDB[SS-22F48-GDB] --- KnobTypeGDB[Knob Type GDB]
    SS22F48GDB --- Lm[L(m)]
    Lm --- Tilde[~]
  
```

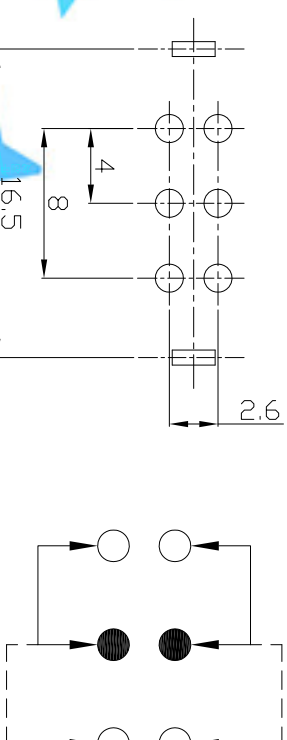

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

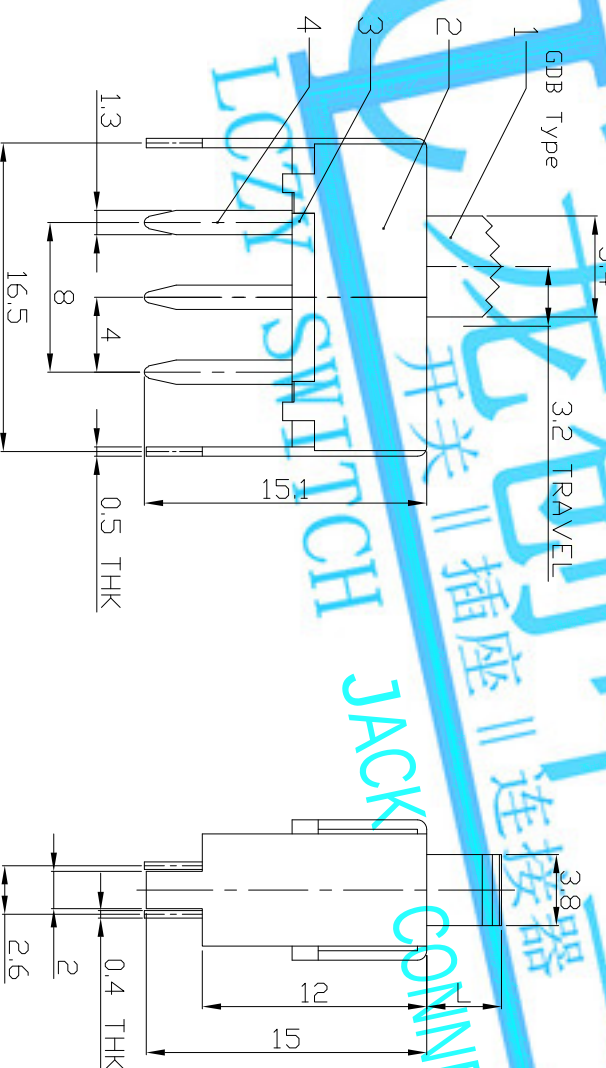

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO:		SS-22F 48					
SLIDE SWITCH / VERTICAL									
D/R: Rocky 2015/05/27		DWG NO:		ADL-22F 48					
C/KKD: Rocky 2015/05/27		SCALE		SHEET		REV.		CUSTOMER	
APPD:		2:1		1/1		A		Rocky DRAWING	
UNITS mm									
MAT'L									
SEE NOTE									
FINISH									
SEE NOTE									
WITHIN 1.5mm: ±0.1mm									
OVER 1.5mm: ±0.2mm									
8									
7									
6									
5									
4									
3									
2									
1									
NO.									
PARTS									
MATERIAL									
Q'TY									
FINISHING									